








R4

miniature industrial relays



6 A / 250 V AC

• Relays of general application • Relays of general application • For plug-in sockets: 35 mm rail mount acc. to PN-EN 60715; on panel mounting; PCB mounting • For PCB and soldering connections - option • Miniature dimensions • Cadmium - free contacts • AC and DC coils • WT (mechanical indicator + lockable front test button) - standard features of relays for plug-in sockets. Relays may be provided with the test buttons (no latching) and plugs - page 12 • **Have obtained LR Type Approval Certificate (Lloyd's Register) - R4...WT** • Recognitions, certifications, directives: RoHS, AUCOTEAM GmbH Berlin - railroad standard,       

Contact data

| | | |
|--------------------------------|------|--|
| Number and type of contacts | | 4 CO |
| Contact material | | AgNi , AgNi/Au 0,2 µm, AgNi/Au 5 µm |
| Rated / max. switching voltage | AC | 250 V / 250 V |
| Min. switching voltage | | 10 V AgNi, 10 V AgNi/Au 0,2 µm, 5 V AgNi/Au 5 µm |
| Rated load (capacity) | AC1 | 6 A / 250 V AC |
| | AC15 | 1,5 A / 120 V 0,75 A / 240 V (C300) |
| | AC3 | 125 W (single-phase motor) |
| | DC1 | 6 A / 24 V DC (see Fig. 3) |
| | DC13 | 0,22 A / 120 V 0,1 A / 250 V (R300) |
| Min. switching current | | 5 mA |
| Max. inrush current | | 12 A |
| Rated current | | 6 A |
| Max. breaking capacity | AC1 | 1 500 VA |
| Min. breaking capacity | | 0,3 W AgNi, 0,3 W AgNi/Au 0,2 µm, 0,1 W AgNi/Au 5 µm |
| Contact resistance | | ≤ 100 mΩ |
| Max. operating frequency | | |
| • at rated load | AC1 | 1 200 cycles/hour |
| • no load | | 18 000 cycles/hour |

Coil data

| | | |
|-----------------------------------|-------------|---|
| Rated voltage | 50/60 Hz AC | 6 ... 240 V |
| | DC | 5 ... 220 V |
| Must release voltage | | AC: ≥ 0,2 U _n DC: ≥ 0,1 U _n |
| Operating range of supply voltage | | see Tables 1, 2 |
| Rated power consumption | AC | 1,6 VA |
| | DC | 0,9 W |

Insulation according to PN-EN 60664-1

| | | |
|-----------------------------|--|---|
| Insulation rated voltage | | 250 V AC |
| Rated surge voltage | | 2 500 V 1,2 / 50 µs |
| Overvoltage category | | II |
| Insulation pollution degree | | 2 |
| Dielectric strength | | |
| • between coil and contacts | | 2 500 V AC type of insulation: basic |
| • contact clearance | | 1 500 V AC type of clearance: micro-disconnection |
| • pole - pole | | 2 000 V AC type of insulation: basic |
| Contact - coil distance | | |
| • clearance | | ≥ 1,6 mm |
| • creepage | | ≥ 3,2 mm |

General data

| | | |
|---|-------------|--|
| Operating / release time (typical values) | | AC: 10 ms / 8 ms DC: 13 ms / 3 ms |
| Electrical life | | |
| • resistive AC1 | | > 10 ⁵ 6 A, 250 V AC |
| • cosφ | | see Fig. 2 |
| Mechanical life (cycles) | | > 2 x 10 ⁷ |
| Dimensions (L x W x H) | | 27,5 x 21,2 x 35,6 mm ❶ 27,5 x 21,1 x 33,5 mm ❷ 27,5 x 21,2 x 33 mm ❸ |
| Weight | | 35 g |
| Ambient temperature | • storage | -40...+85 °C |
| | • operating | AC: -40...+55 °C DC: -40...+70 °C |
| Cover protection category | | IP 40 PN-EN 60529 |
| Environmental protection | | RTI PN-EN 116000-3 |
| Shock resistance | (NO/NC) | 10 g / 5 g |
| Vibration resistance | | 5 g 10...150 Hz |
| Solder bath temperature | | max. 270 °C |
| Soldering time | | max. 5 s |

The data in bold type pertain to the standard versions of the relays.

❶ For plug-in sockets version: standard (WT) ❷ For PCB version ❸ For version with threaded bolt

R4

miniature industrial relays

Coil data - DC voltage version

Table 1

| Coil code | Rated voltage V DC | Coil resistance at 20 °C Ω | Acceptable resistance | Coil operating range V DC | |
|-------------|-----------------------|---|------------------------------|------------------------------|-----------------|
| | | | | min. (at 20 °C) | max. (at 55 °C) |
| 1005 | 5 | 28 | $\pm 10\%$ | 4,0 | 5,5 |
| 1006 | 6 | 40 | $\pm 10\%$ | 4,8 | 6,6 |
| 1012 | 12 | 160 | $\pm 10\%$ | 9,6 | 13,2 |
| 1024 | 24 | 640 | $\pm 10\%$ | 19,2 | 26,4 |
| 1048 | 48 | 2 600 | $\pm 10\%$ | 38,4 | 52,8 |
| 1060 | 60 | 4 000 | $\pm 10\%$ | 48,0 | 66,0 |
| 1080 | 80 | 7 100 | $\pm 10\%$ | 64,0 | 88,0 |
| 1110 | 110 | 13 600 | $\pm 10\%$ | 88,0 | 121,0 |
| 1125 | 125 | 16 000 | $\pm 10\%$ | 100,0 | 137,5 |
| 1220 | 220 | 54 000 | $\pm 10\%$ | 176,0 | 242,0 |

The data in bold type pertain to the standard versions of the relays.

Coil data - AC 50/60 Hz voltage version

Table 2

| Coil code | Rated voltage V AC | Coil resistance at 20 °C Ω | Acceptable resistance | Coil operating range V AC | |
|-------------|-----------------------|---|------------------------------|------------------------------|-----------------|
| | | | | min. (at 20 °C) | max. (at 55 °C) |
| 5006 | 6 | 9,8 | $\pm 10\%$ | 4,8 | 6,6 |
| 5012 | 12 | 39,5 | $\pm 10\%$ | 9,6 | 13,2 |
| 5024 | 24 | 158 | $\pm 10\%$ | 19,2 | 26,4 |
| 5042 | 42 | 470 | $\pm 10\%$ | 33,6 | 46,2 |
| 5048 | 48 | 640 | $\pm 10\%$ | 38,4 | 52,8 |
| 5060 | 60 | 930 | $\pm 10\%$ | 48,0 | 66,0 |
| 5080 | 80 | 1 720 | $\pm 10\%$ | 64,0 | 88,0 |
| 5110 | 110 | 3 450 | $\pm 10\%$ | 88,0 | 121,0 |
| 5115 | 115 | 3 610 | $\pm 10\%$ | 92,0 | 127,0 |
| 5120 | 120 | 3 770 | $\pm 10\%$ | 96,0 | 132,0 |
| 5127 | 127 | 4 000 | $\pm 10\%$ | 101,6 | 139,0 |
| 5220 | 220 | 15 400 | $\pm 10\%$ | 176,0 | 242,0 |
| 5230 | 230 | 16 100 | $\pm 10\%$ | 184,0 | 253,0 |
| 5240 | 240 | 16 800 | $\pm 10\%$ | 192,0 | 264,0 |

The data in bold type pertain to the standard versions of the relays.

EUROPRODUCT 2002
for electromagnetic relays
R2...WT, R3...WT, R4...WT
with sockets **GZT2, GZT3, GZT4**


ELECTROPRODUCT 2003
for electromagnetic relays
R2, R3, R4




R4

miniature industrial relays


Dimensions - plug-in version (WT), with lockable front test button type T

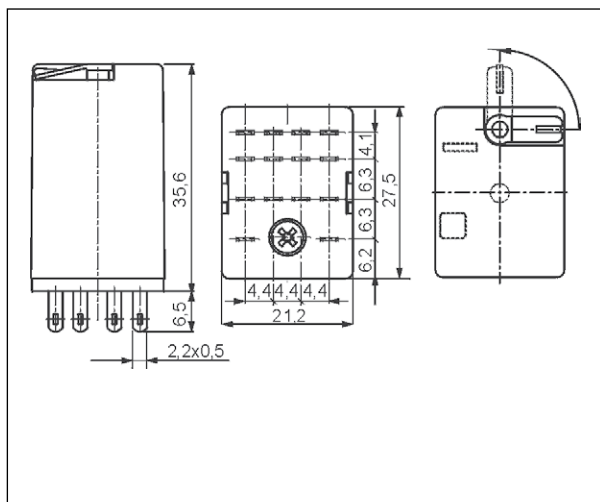


Dimensions - plug-in version, with test button (no latching) or with plug (no manual operation)

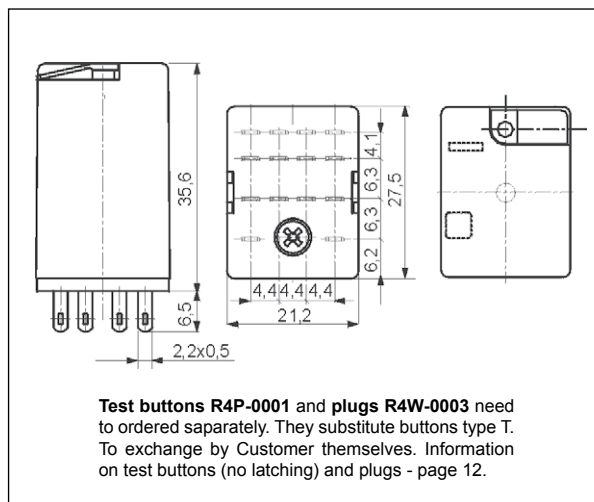

Dimensions - PCB version (without WT)

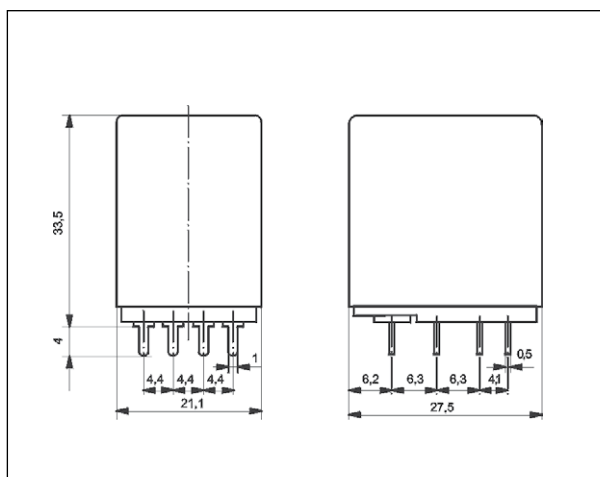

Dimensions - version with threaded bolt

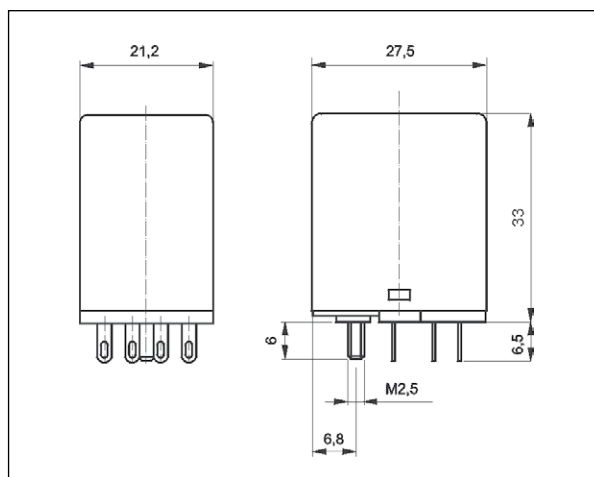

Mounting

Relays R4 are offered in versions:


- For plug-in sockets, with WT features as standard (W - mechanical indicator + T - lockable front test button). In these relays is possibility self-exchange of button type T for test button R4P-0001 (no latching) or on plug R4W-0003 (no manual operation). The buttons R4P-0001 and the plugs R4W-0003 need to ordered separately.
- For PCB (without WT features).
- With threaded bolt (for PCB and for plug-in sockets, without WT features).

GZMB4

Spring terminals
plug-in socket
for R4, R4N
- see page 7.




Connection diagram (pin side view)

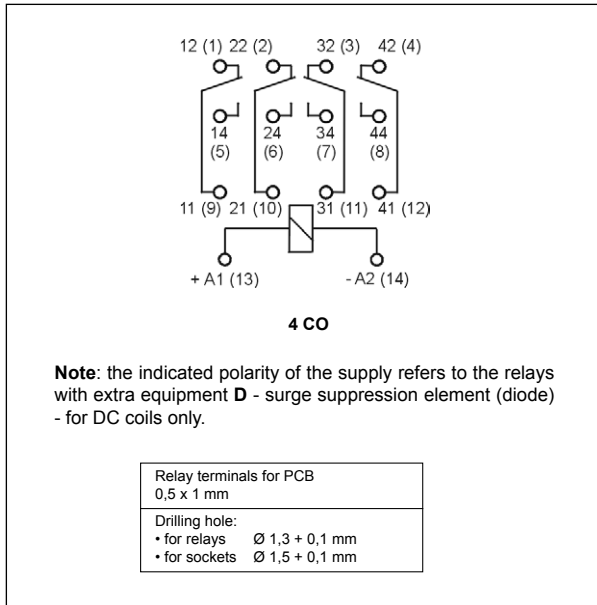


Electrical life at AC resistive load. Switching frequency: 1 200 cycles/hour

Fig. 1

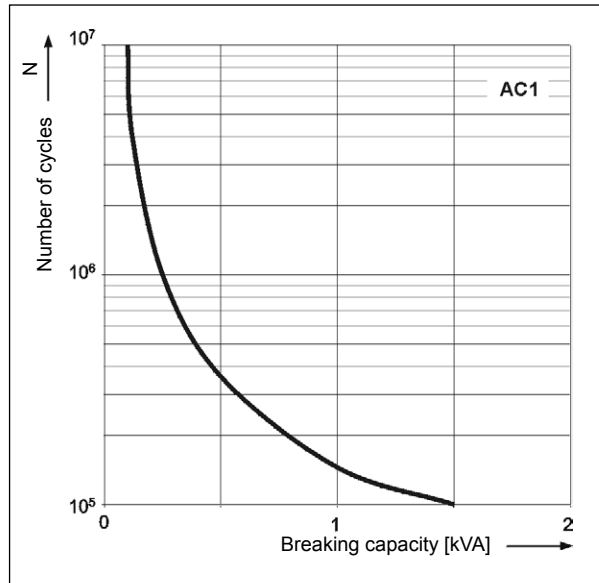


Electrical life reduction factor at AC inductive load

Fig. 2

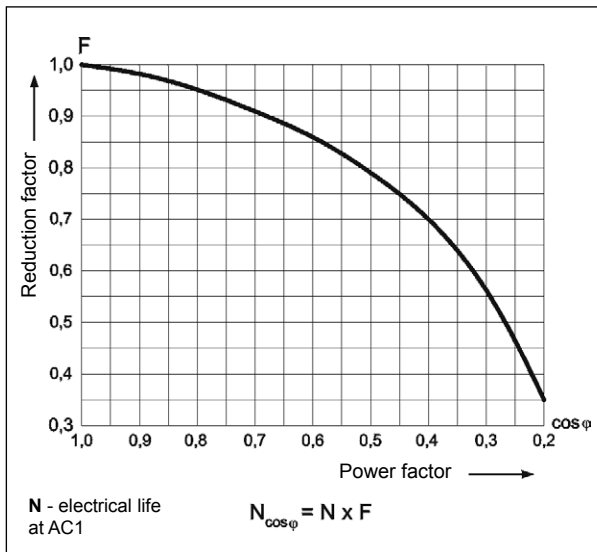

Max. DC breaking capacity A - resistive load DC1 B - inductive load L/R = 40 ms

Fig. 3

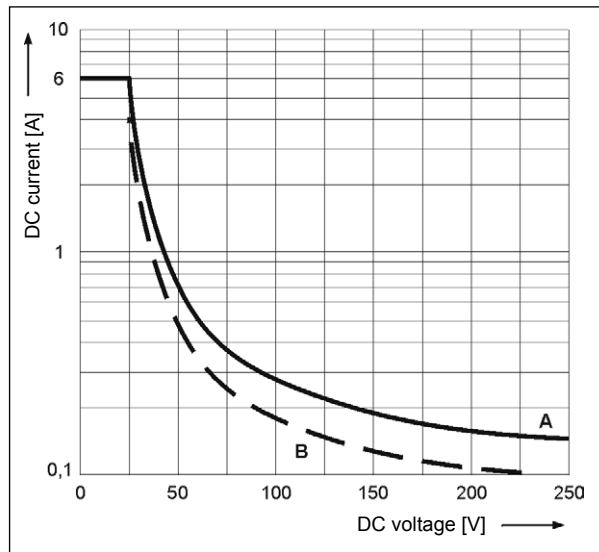

Mounting

Relays **R4** are designed for: • screw terminals plug-in sockets **GZT4** ④ and **GZM4** ⑤ with clip **GZT4-0040** or **G4 1052**, 35 mm rail mount acc. to PN-EN 60715 or on panel mounting with two M3 screws • spring terminals plug-in sockets **GZMB4** ⑥ with clip **GZMB4-0040** or **G4 1052**, 35 mm rail mount acc. to PN-EN 60715. Signalling / protecting modules **type M...** are available with sockets (see page 9) • screw terminals plug-in sockets **GZ4** with clip **G4 1052** or plug-in sockets **GS4** with clip **GS4-0036**, 35 mm rail mount acc. to PN-EN 60715 or on panel mounting with two M3 screws • plug-in sockets for PCB mounting **SU4D** with clip **G4 1053** (WT) or **G4 1050** (without WT) • solder terminals sockets **SU4L** with clip **G4 1053** (WT) or **G4 1050** (without WT) and spring clamp **G4 1040** • solder terminals sockets **G4** with clip **G4 1053** (WT) or **G4 1050** (without WT) • direct PCB mounting..


④ Plug-in sockets **GZT4**, **GZM4** may be linked with interconnection strip type **ZGGZ4** (see page 10).

⑥ For sockets **GZMB4** - see page 7 (wire connection).

Contact material selection for different load types

- **AgNi** - for resistive or inductive loads,
- **AgNi/Au 0,2 µm** - Au protects the contact surface during storage,
- **AgNi/Au 5 µm** - for small resistive loads in control circuits.

Ordering codes

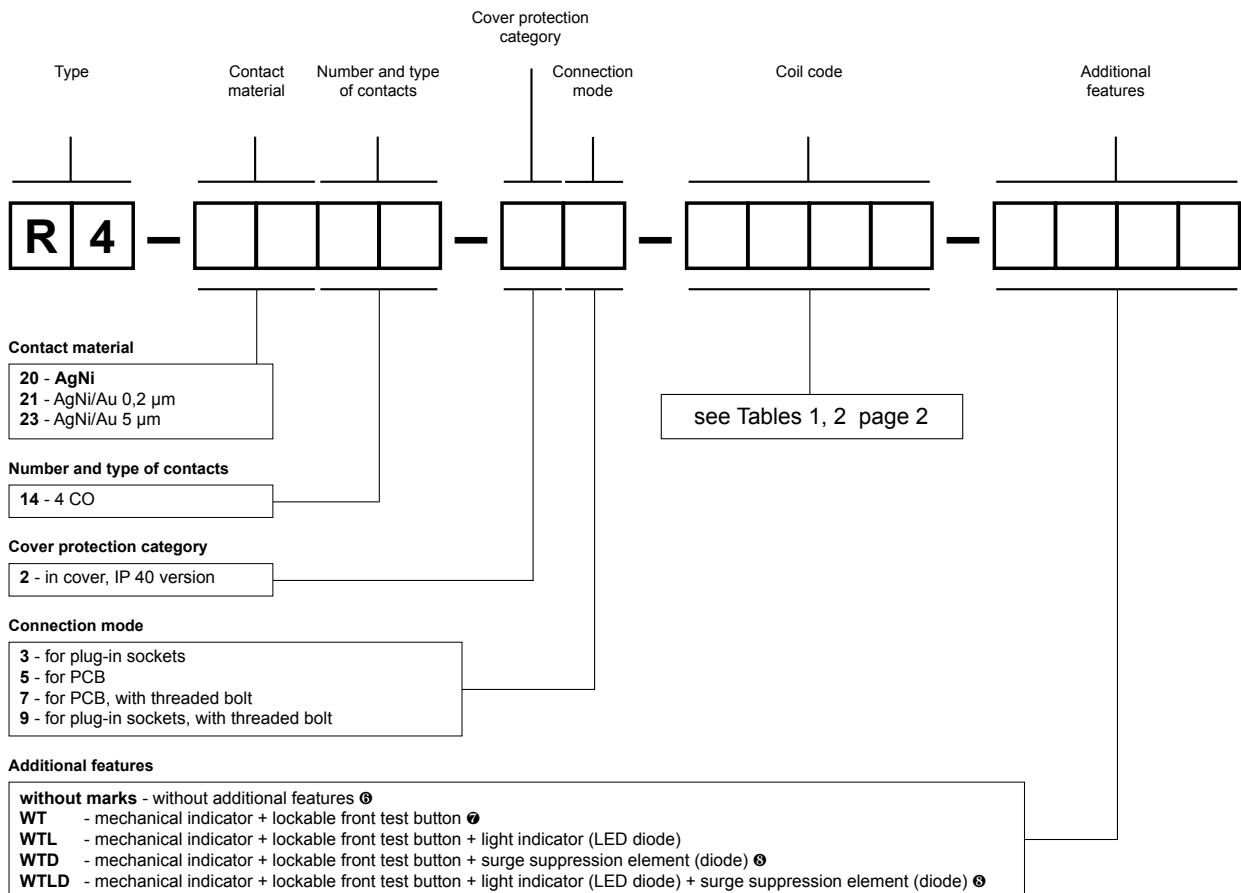

- ⑥ Refer relays for PCB and with threaded bolt
- ⑦ WT - standard features of relays for plug-in sockets
- ⑧ WTD, WTLD - available only in relays with DC coils

Test buttons (no latching) and plugs need to ordered separately. They substitute buttons type T. To exchange by Customer themselves. Information on test buttons (no latching) and plugs - page 12.

- Button R4P-0001-A - orange colour (AC coils)
- Button R4P-0001-D - green colour (DC coils)
- Plug R4W-0003-A - orange colour (AC coils)
- Plug R4W-0003-D - green colour (DC coils)

Note:

For relays with additional features **D** - surge suppression element (diode) (versions WTD and WTLD) - fixed supply polarity compulsory for the DC load of coils: +A1(13) / -A2(14). The polarity is indicated on the relay cover. For other versions of the relays with DC coils any polarity is possible.

Example of ordering code:

R4-2014-23-5230-WTL relay **R4**, for plug-in sockets, four changeover contacts, contact material AgNi, coil voltage 230 V AC 50/60 Hz, with mechanical indicator and lockable front test button and light indicator (LED diode), in cover IP 40

Plug-in sockets and accessories


GZT4 ③

For R4, R4N, T-R4


Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount
acc. to PN-EN 60715
or on panel mounting
76,3 x 27 x 42,5(80) mm ②
Four poles
6 A, 300 V AC



Connection diagram



Dimensions

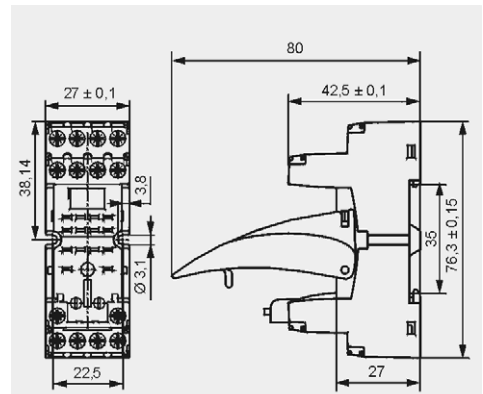

Accessories ① ④


GZM4

For R4, R4N, T-R4


Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount
acc. to PN-EN 60715
or on panel mounting
75 x 27 x 61(82) mm ②
Four poles
6 A, 300 V AC



Connection diagram



Dimensions

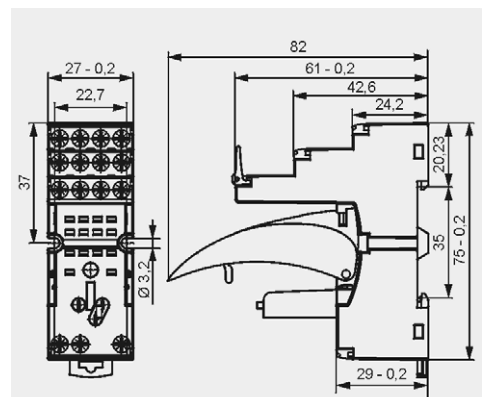

Accessories ① ④


GZ4

For R4, R4N


Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount
acc. to PN-EN 60715
or on panel mounting
66,4 x 29,5 x 29 mm
Four poles
10 A, 300 V AC



Connection diagram



Dimensions

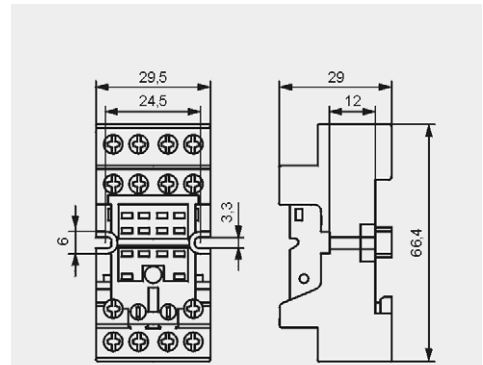


Accessories



GS4

For R4, R4N


Screw terminals
Max. tightening moment for the terminal: 0,7 Nm
35 mm rail mount
acc. to PN-EN 60715
or on panel mounting
67 x 30,8 x 30(~63,7) mm ⑤
Four poles
6 A, 300 V AC



Connection diagram



Dimensions

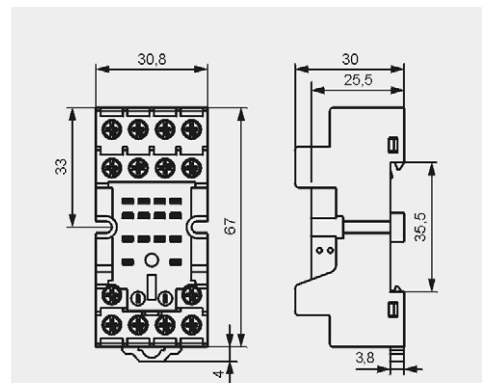

Accessories

① Mounting and sub-assemblies of accessories in the socket - see page 7. Signalling / protecting modules type M... - see page 9. ② In the bracket the height of socket with retainer / retractor clip is shown. ③ Have obtained LR Type Approval Certificate (Lloyd's Register). ④ For R4, R4N relays: G4 1052, GZT4-0040, GZMB-0040, GZT4-0035, TR, module type M...; for T-R4 relays: TR4-2000, GZT4-0035, TR ⑤ In the bracket the height of socket with spring wire clip is shown.

Plug-in sockets and accessories

GZMB4

For R4, R4N, T-R4

Spring terminals

Max. cross section of the cables:
1 x 0,2...1,5 mm²
(1 x 24...16 AWG)

Length of the cable deinsulation:
9...11 mm

35 mm rail mount




acc. to PN-EN 60715

95 x 31 x 42,5(80) mm


Four poles

10 A, 300 V AC

Connection diagram

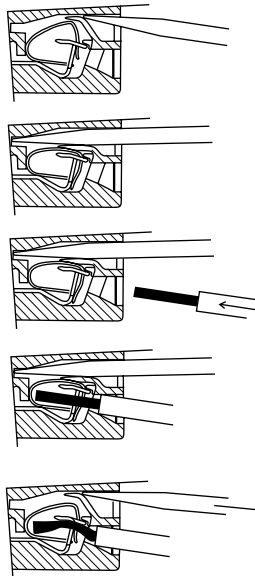

Dimensions

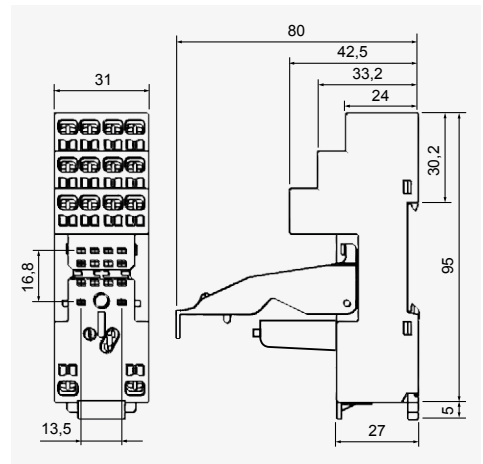

The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM „A”.



GZMB4-0040



TR



Module type M...



G4 1052



TR4-2000

Accessories 1 4

Wire connection

1 Mounting and sub-assemblies of accessories in the socket - see page 7. Signalling / protecting modules type M... - see page 9. 2 In the bracket the height of socket with retainer / retractor clip is shown. 3 For R4, R4N relays: G4 1052, GZT4-0040, GZMB-0040, GZT4-0035, TR, module type M...; for T-R4 relays: TR4-2000, GZT4-0035, TR

Mounting and sub-assemblies of the relay and accessories in the socket

Signalling / protecting module type M...

Electromagnetic relay

Retainer / retractor clip

Removing the relay from the socket with a retainer / retractor clip


Screw terminals plug-in socket

Description plate


Plug-in sockets and accessories

SU4D

For R4, R4N
For PCB
29,6 x 21,5 x 11 mm
Four poles
6 A, 250 V AC




Pinout



Accessories ⑥

G4 1053 G4 1050

Dimensions

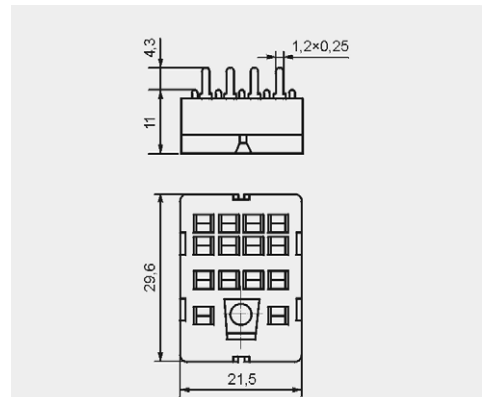


SU4L

For R4, R4N
Solder terminals
29,6 x 21,5 x 18,1 mm
Four poles
6 A, 250 V AC




Dimensions of opening on panel mounting



Accessories ⑥


G4 1053 G4 1050 G4 1040

Dimensions

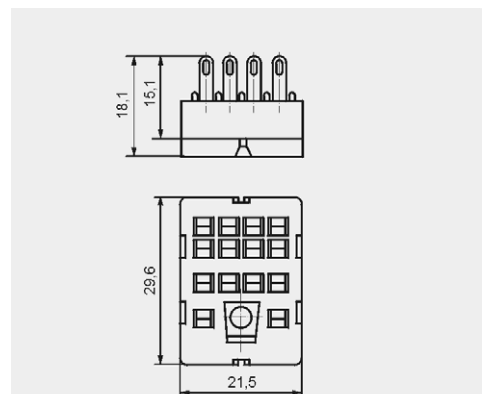


G4

For R4, R4N
Solder terminals
40,5 x 21,5 x 18,1 mm
Four poles
6 A, 250 V AC




Pinout of openings on panel mounting



Accessories ⑥

G4 1053 G4 1050

Dimensions

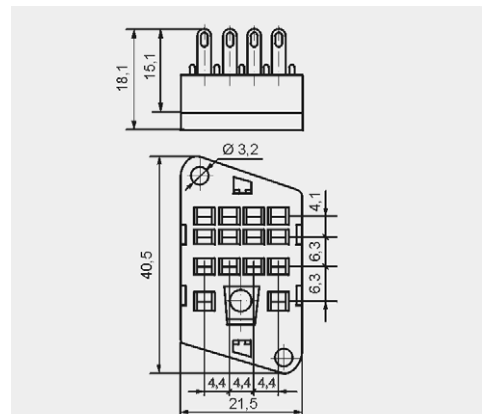

⑥ G4 1053 - for R2...WT, R2N...WT, R4...WT, R4N...WT relays; G4 1050 - for R2, R2N, R4, R4N without WT

PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.


Signalling / protecting modules type M...

For sockets type:

GZT80, GZM80, GZS80, GZMB80, GZT92, GZM92, GZS92, ES 32, GZT2, GZM2, GZMB2, GZT3, GZM3, GZT4, GZM4, GZMB4

Modules type M... are parallelly connected with relay coil.


Polarity P: -A1/+A2. Polarity N: +A1/-A2.



| Modules type M... | Layout | Voltage | Type of module ① ② |
|--|--------|--|--|
| Module D (polarization P) It limits overvoltage on DC coils. | | 6/230 V DC | M21P |
| Module D (polarization N) It limits overvoltage on DC coils. | | 6/230 V DC | M21N |
| Module LD (polarization P) It limits overvoltage on DC coils. Coil energizing indication. | | 6/24 V DC 24/60 V DC 110/230 V DC | M31R, M31G M32R, M32G M33R, M33G |
| Module LD (polarization N) It limits overvoltage on DC coils. Coil energizing indication. | | 6/24 V DC 24/60 V DC 110/230 V DC | M41R, M41G M42R, M42G M43R, M43G |
| Module RC It protects against EMC disturbance. It limits overvoltage. | | 6/24 V AC 24/60 V AC 110/240 V AC | M51 M52 M53 |
| Module L Coil energizing indication. | | 6/24 V AC/DC 24/60 V AC/DC 110/230 V AC/DC | M61R, M61G M62R, M62G M63R, M63G |
| Module LV It limits overvoltage on AC and DC coils. Coil energizing indication. | | 6/24 V AC/DC 24/60 V AC/DC 110/230 V AC/DC | M91R, M91G M92R, M92G M93R, M93G |
| Module V It limits overvoltage on AC and DC coils. No indication. | | 24 V AC 130 V AC 230 V AC | M71 M72 M73 |
| Module R It limits overvoltage on AC coils. | | 110/230 V AC | M103 |

① M...R - LED red, M...G - LED green

② When ordering modules indicate their color: gray or black.

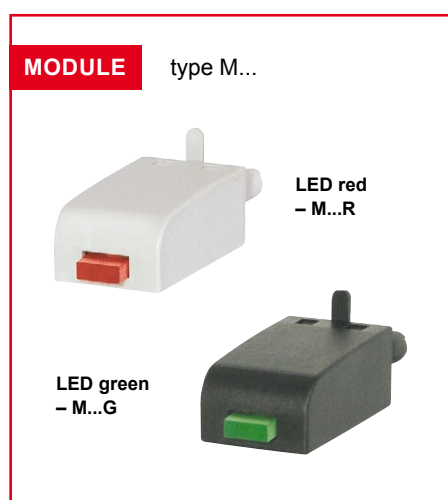

Interconnection strips ZGGZ4





ZGGZ4 for:

| Plug-in sockets | Relays for plug-in sockets | Interface relays [⊕] |
|-----------------|----------------------------|--------------------------------|
| GZT2 | R2...WT, R2N...WT | PIR2-...-00L. (GZM2 + R2...WT) |
| GZM2 | | PIR3-...-00L. (GZM3 + R3...WT) |
| GZT3 | R3...WT, R3N...WT | PIR4-...-00L. (GZM4 + R4...WT) |
| GZM3 | | |
| GZT4 | R4...WT, R4N...WT | |
| GZM4 | | |

[⊕] Interface relay **PIR2** (**PIR3**, **PIR4**) is offered as a **set**: plug-in socket **GZM2** (**GZM3**, **GZM4**) + miniature industrial relay **R2** (**R3**, **R4**) + signalling / protecting module **type M...** + retainer / retractor clip **GZT4-0040** + description plate **GZT4-0035**.



Interconnection strip ZGGZ4

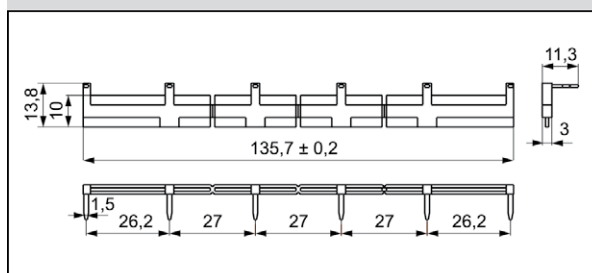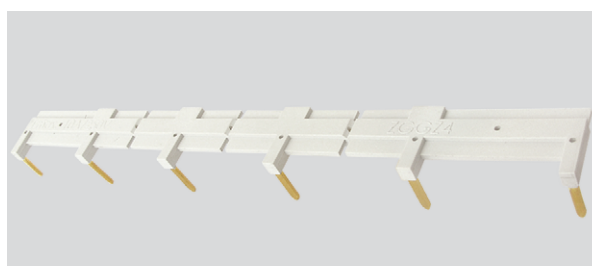






- designed for the co-operation with plug-in sockets of miniature industrial relays and with interface relays PIR2, PIR3 and PIR4, which are equipped with screw terminals; sockets and relays are mounted on 35 mm rail mount acc. to PN-EN 60715,
- bridges common input signals (coil terminals A1 or A2) or output signals - see photo at the top,
- maximum permissible current is 10 A / 250 V AC,
- possibility of connection of 6 sockets or relays,
- colours of strips: **ZGGZ4-1** grey, **ZGGZ4-2** black.




11.09.2013

Additional features for industrial relays

Industrial relays for plug-in sockets: R2, R2N, R3, R3N, R4, R4N, R15 - 2 CO , R15 - 3 CO  with **WT features as standard** (**W** - mechanical indicator + **T** - lockable front test button). **Detailed information** on additional features of individual relays can be found in the data sheets on the side of "Ordering codes".

| Type  | Description | For industrial relays |
|--|---|--|
| W | mechanical indicator | R2, R2N, R3, R3N, R4, R4N, (R15 - 2 CO, 3 CO ) |
| T | lockable front test button, orange colour - AC coils, green colour - DC coils | R2, R2N, R3, R3N, R4, R4N, (R15 - 2 CO, 3 CO ) |
| L | light indicator (LED diode), located inside the relay | R2, R2N, R3, R3N, R4, R4N, RY2, (R15 - 2 CO, 3 CO, 4 CO ) RUC, RUC-M |
| D | surge suppression element (diode) - only for DC coils | R2, R2N, R3, R3N, R4, R4N, RY2, (R15 - 2 CO, 3 CO, 4 CO ) |
| V | surge suppression element (varistor) - only for AC coils | (R15 - 2 CO, 3 CO ) |
| K | test button without block function | (R15 - 4 CO ), RUC |

 Available combinations:

WT, WTL, WTD, WTL D - in relays R2, R2N, R3, R3N, R4, R4N for plug-in sockets


L, D, LD - in relays RY2 for plug-in sockets


WT, WTL, WTD, WTL D, WTV, WTL V - in relays R15 - 2 CO, 3 CO for plug-in sockets

K, L, D, KL, KD, LD, KLD - in relays R15 - 4 CO for plug-in sockets

K, L, KL - in relays RUC

L - in relays RUC-M

 Voltage versions, in cover

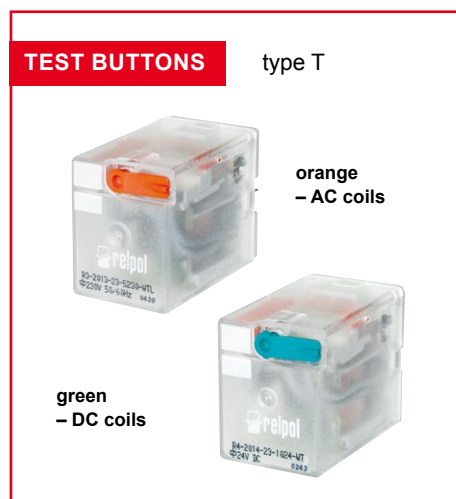

Test buttons (no latching) and plugs

Test buttons (no latching) are recommended for R2...WT, R2N...WT, R3...WT, R3N...WT, R4...WT, R4N...WT, R15...WT 2 CO, R15...WT 3 CO relays - **for applications that do not allow permanent contact latching**. By manual operation (pressing the button) relay contacts can get switched for as long time as long the button is pressed. Contacts return to initial position as soon as pressure is released from the button. Those operations can be done while the coil is deenergized.

Button **R4P-0001** or **R15-M404** can be easily inserted by the Customer after removal of button type **T** (see Fig. 2). Button type **T** can be removed with screwdriver as shown on Fig. 1.




Fig. 1






Fig. 2

Dimensions - test button R4P-0001 for R2...WT, R2N...WT, R3...WT, R3N...WT, R4...WT, R4N...WT

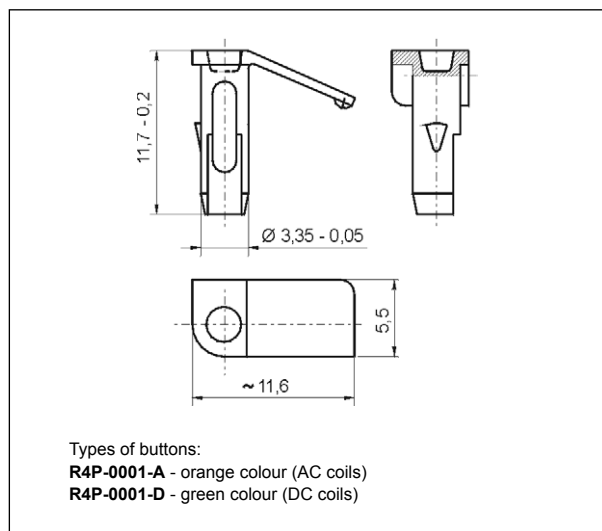


Dimensions - test button R15-M404 for R15...WT 2 CO, R15...WT 3 CO

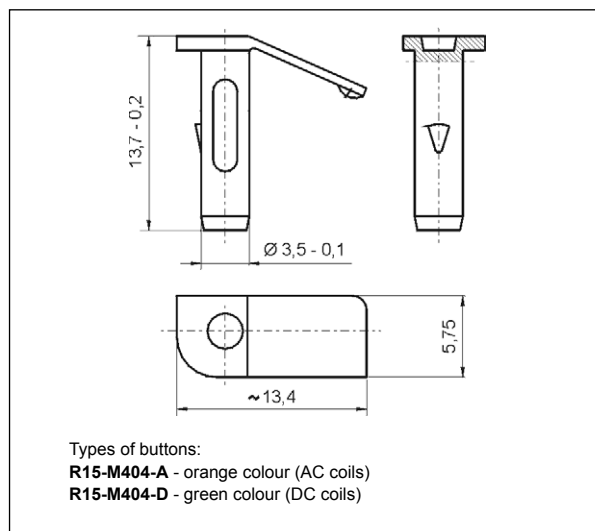

Plugs R4W-0003 or **R15-M203** can substitute button type **T** if **manual operation (latching and testing) is not allowed**. Changing button type **T** for plug can be done by Customer themselves in the same way as changing button type **T** for button (no latching).

Dimensions - plug R4W-0003 for R2...WT, R2N...WT, R3...WT, R3N...WT, R4...WT, R4N...WT

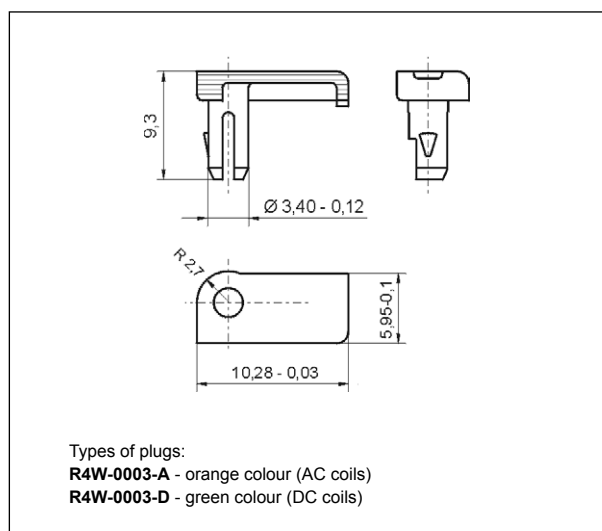

Dimensions - plug R15-M203 for R15...WT 2 CO, R15...WT 3 CO

