


RSR88...NC

solid state relays, miniature



- DC switching • DC control input
- Transistor output - normally closed type • Load current 3 A
- Load voltage 100 V DC
- Dielectric strength 2 500 Vrms (photoelectric-isolation)
- LED indicator (red)
- Flat insert connectors - faston 187 (4,8 x 0,5 mm)
- For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting
- Recognitions, certifications, directives: RoHS, REACH, 

Applications

Suitable for the isolation and control of weak current to strong current, convenient for all kinds of computers and digital interfaces, widely used in various DC motors, DC power sources and various electromagnetic devices in the field of industrial automation.



Basic technical data

Load voltage: 100 V DC
 Control input: DC
 Load current: 3 A

| Type | | DC switching |
|--------------|-----------------|----------------------|
| Load voltage | Control voltage | Load current |
| 100 V DC | 4...32 V DC | 3 A |
| | | RSR88-10D3-NC |

Load voltage

| | RSR88-10... |
|-----------------------------|---------------------|
| Rated load voltage | 100 V DC |
| Rated range of load voltage | 3...75 V DC |
| Blocking voltage | 150 V _{pk} |

RSR88...NC

solid state relays, miniature

Control input

DC switching

| | RSR88...D... |
|-----------------------|---------------|
| Control voltage range | 4...32 V DC |
| Must turn-on voltage | 1 V DC |
| Must turn-off voltage | 4 V DC |
| Maximum input current | 18 mA 32 V DC |

Output circuit

| | RSR88...3... |
|--|--------------|
| Rated load current | 3 A |
| Rated load range | 0,1...3 A |
| Maximum surge current | 9 A 10 ms |
| Maximum off-state leakage current (at rated load voltage) | 0,1 mA |
| Maximum on-state voltage drop (at rated current) | 1,3 V DC |
| Maximum turn-on time | 1 ms |
| Maximum turn-off time | 1 ms |

General data

| | RSR88... |
|--|---|
| Dielectric strength | input - output: 2 500 Vrms 50/60 Hz |
| Minimum insulation resistance | input - output: 1 000 MΩ 500 V DC |
| Ambient temperature (non-condensation and/or icing) | storage: -30...+100 °C operating: -30...+80 °C |

Mechanical data

| | RSR88... | RSR88... with socket GZMA-71 |
|------------------------------|---------------------|------------------------------|
| Dimensions (L x W x H) | 32 x 13 x 43 mm | 77 x 16 x 64 mm |
| Weight (typical) | 20 g | 50 g |
| Protection category EN 60529 | IP 00 | IP 20 |
| Mounting on 35 mm rail mount | with socket GZMA-71 | direct |

❶ Data given for ambient temperature ≤ 25 °C. Above 25 °C the maximum current decreases - see "Thermal derating curves", page 4.

GZMA-71

Screw terminals
plug-in sockets
for RSR88, RSR89



RSR88...NC


solid state relays, miniature

Mounting


Relays **RSR88...NC** are designed for mounting in plug-in sockets **GZMA-71**.
For conventional installation, the recommended minimum distance is 13 mm.

| Sockets for RSR88 | Accessories | Additional equipment |
|---|----------------------------|----------------------|
| | Retainer / retractor clips | |
| Screw terminals sockets, 35 mm rail mount (acc. to EN 60715) or on panel mounting (one M3 screw) | | |
| GZMA-71 ② | GZ7-0040 black | ZGGZ80 ③ |

② Socket is sold complete with retainer / retractor clip. ③ Interconnection strips ZGGZ80 - see "Connecting accessories", page 5.

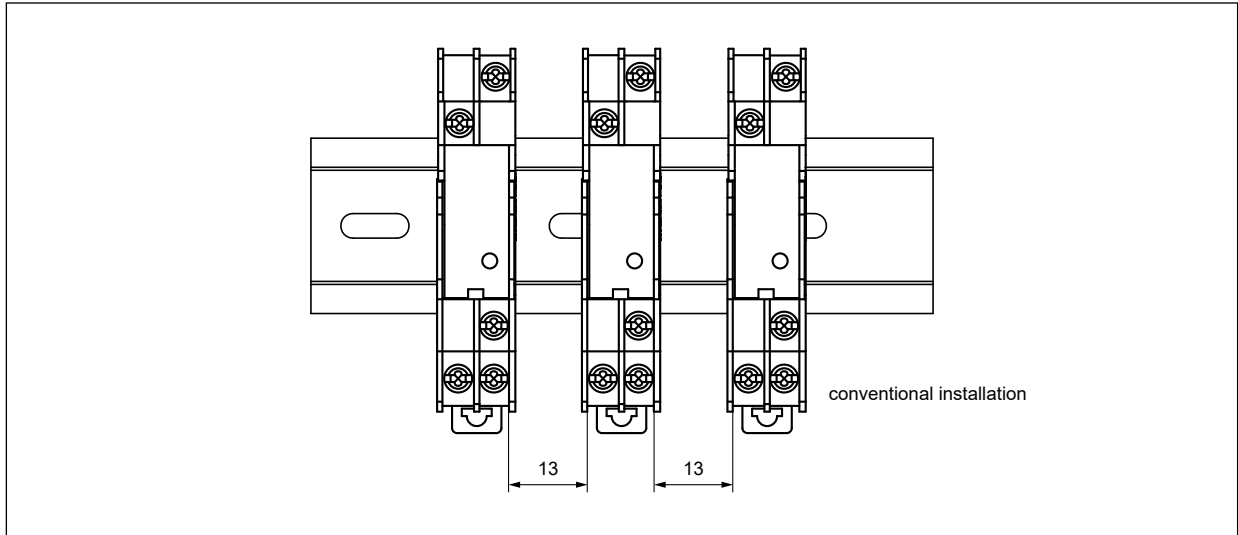


Dimensions

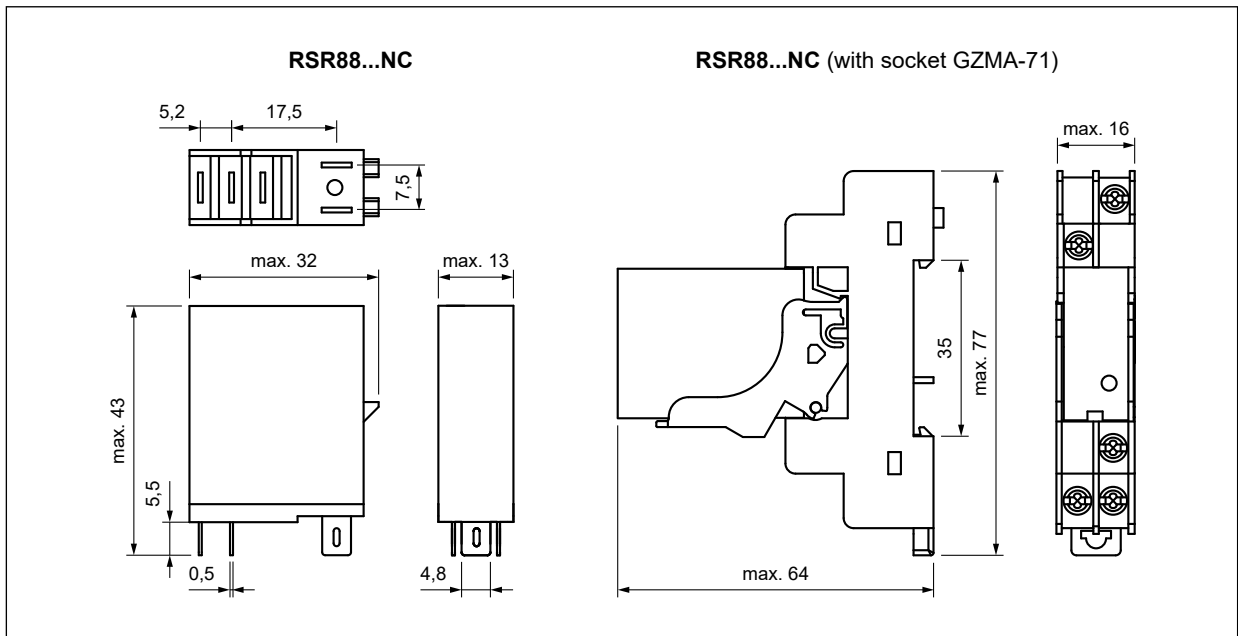


RSR88...NC

solid state relays, miniature

Thermal derating curves

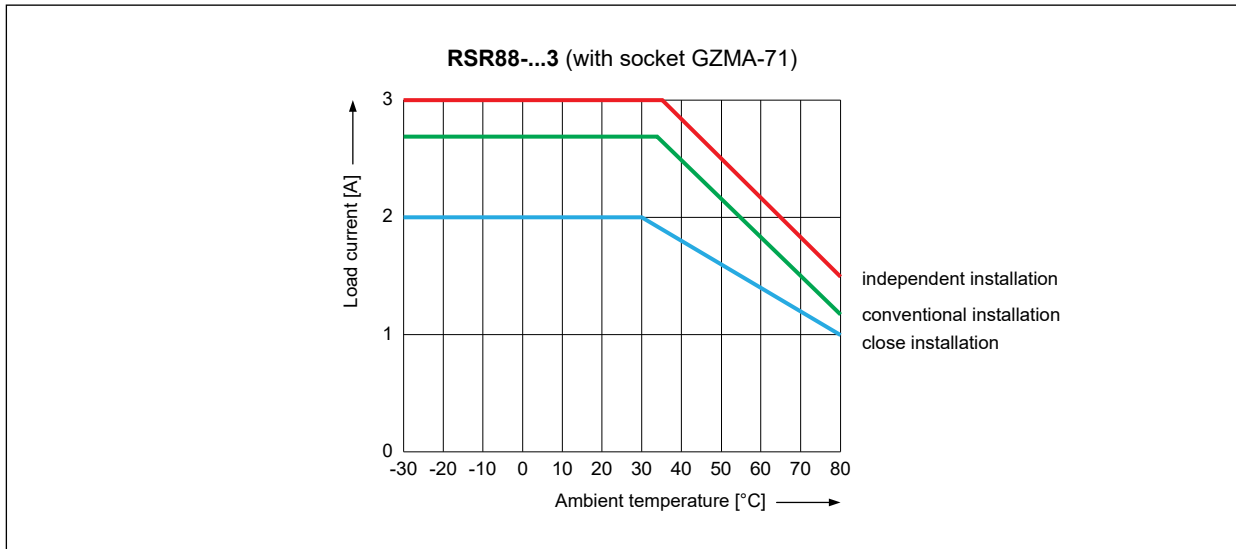


Input characteristic

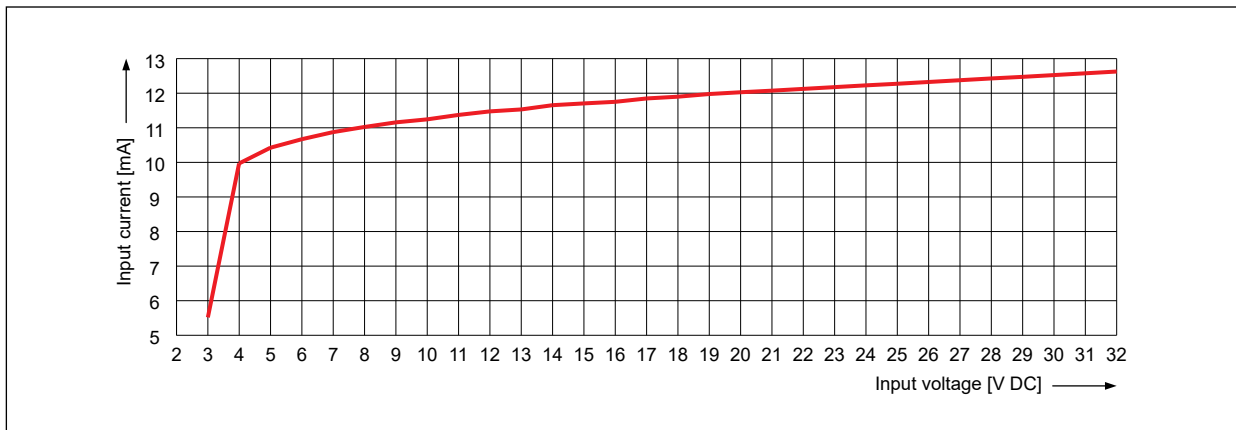

ⓘ The input curve is measured at ambient temperature 25 °C.


Connection diagrams

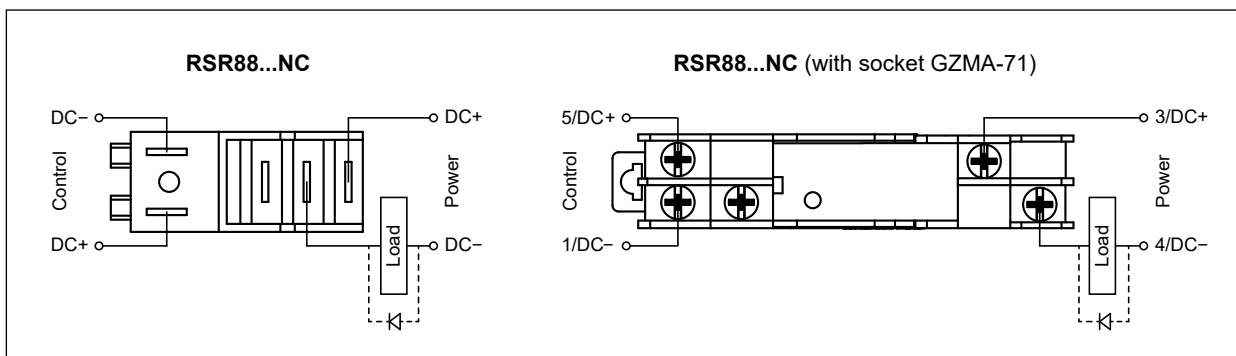

RSR88...NC

solid state relays, miniature

Ordering codes

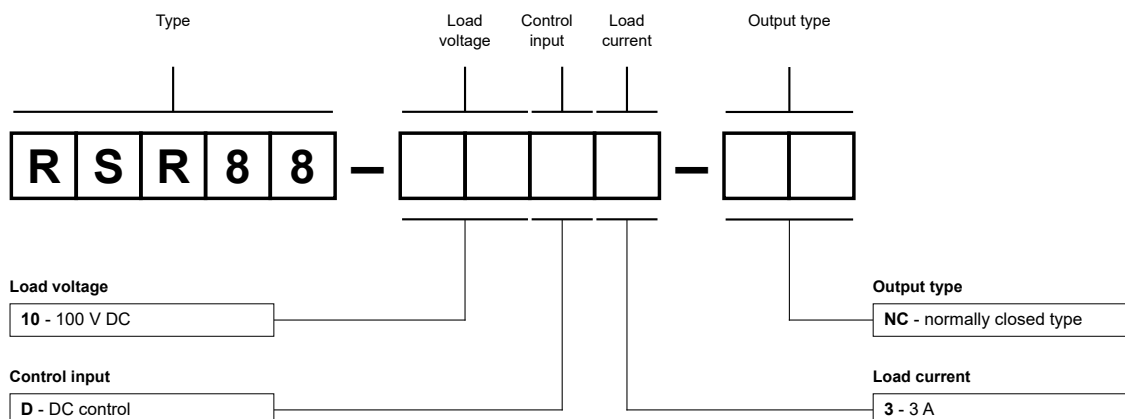

Example of ordering codes:

RSR88-10D3-NC

relay **RSR88...NC**, miniature for plug-in sockets, DC control, load voltage 100 V DC, load current 3 A, normally closed type

Connecting accessories



ZGGZ80-1 grey
ZGGZ80-2 black

Plug-in sockets **GZMA-71** may be linked with interconnection strip type **ZGGZ80**.

Strips 8-poles ZGGZ80: unlimited possibilities of connection configurations in sockets GZMA-71 (bridging of common input signals of 8 sockets - A1, A2), fast, safe and easy bridging of signals on the coil, maximum permissible current is 10 A / 250 V AC.

