


Sockets and accessories



SU4L

For R4N

Solder terminals
29,6 x 21,5 x 18,1 mm
Four poles
6 A, 250 V AC



Dimensions of opening on panel mounting




Accessories

G4 1053

G4 1040


Dimensions

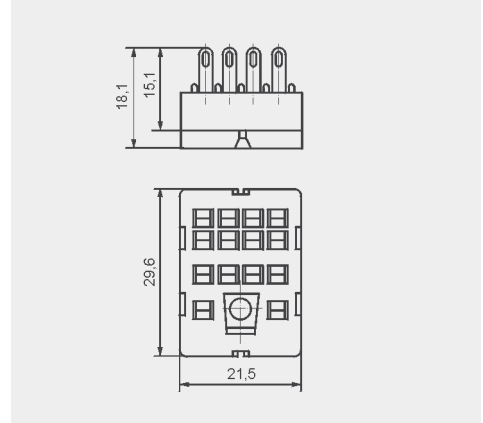


G4

For R4N

Solder terminals
40,5 x 21,5 x 18,1 mm
Four poles
6 A, 250 V AC




Pinout of openings on panel mounting



Accessories

G4 1053


Dimensions

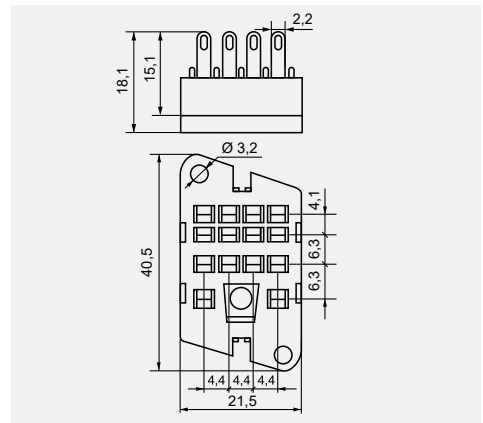



GZ2

For R2M

Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
35 mm rail mount
acc. to EN 60715
or on panel mounting
65,2 x 20 x 25 mm
Two poles
7 A, 250 V AC




Connection diagram



Accessories

GZ2 1060


Dimensions

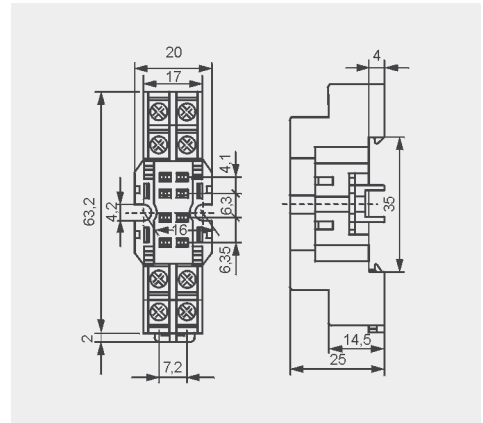


S2M

For R2M

For PCB
29,6 x 14 x 10,5 mm
Two poles
5 A, 250 V AC



Pinout



Accessories

G4 1050

Dimensions

