

RSR89...NC

single-phase solid state relays, miniature



- Zero-crossing switching • DC control input
- Triac output - normally closed type • Load current 5 A
- Max. load voltage 280 V AC (single-phase)
- Dielectric strength 2 500 V_{rms} (photoelectric-isolation)
- RC protection (built-in resistor, capacitor)
- LED indicator (red)
- Flat insert connectors - faston 187 (4,8 x 0,5 mm)
- For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting
- Recognitions, certifications, directives: RoHS, REACH,  

Applications

Suitable for lighting control, motor control, vending machine control, medical device control, valve control and etc.



Basic technical data

Load voltage: 24...280 V AC

Control input: DC

Load current: 5 A

Type		zero-crossing
Load voltage	Control voltage	Load current
24...280 V AC	4...32 V DC	5 A
		RSR89-24D5-NC

Load voltage

	RSR89-24D5-NC
Rated load voltage	240 V AC
Rated range of load voltage	24...280 V AC
Blocking voltage	600 V _{pk}
Rated frequency	47...63 Hz
Power factor	0,5

RSR89...NC

single-phase solid state relays, miniature

Control input

zero-crossing

	RSR89...D...
Control voltage range	4...32 V DC
Must turn-on voltage	1 V DC
Must turn-off voltage	4 V DC
Zero voltage turn-on	≤ 20 V
Maximum input current	18 mA 32 V DC
Response time pick-up	≤ 1/2 cycle + 1 ms
Response time drop-out	≤ 1/2 cycle + 1 ms

Output circuit ●

	RSR89...5...
Rated load current	5 A
Rated load range	0,1...5 A
Maximum surge current	250 A 10 ms
I ² t for fusing	312 A ² s 10 ms
Max. operational current AC-51 rating	5 A
Max. operational current AC-53 rating	1,5 A
Min. operational current	100 mA
Maximum off-state leakage current (at rated load voltage)	5 mA
Maximum on-state voltage drop (at rated current)	1,5 V _{rms}
Minimum off-state dV/dt (at max. rated voltage)	200 V/μs

General data ●

	RSR89-...
Dielectric strength	input - output: 2 500 V _{rms} 50/60 Hz
Minimum insulation resistance	input - output: 1 000 MΩ 500 V DC
Ambient temperature (non-condensation and/or icing)	storage: -30...+100 °C operating: -30...+80 °C

Mechanical data

	RSR89-...	RSR89-... with socket GZMA-71
Dimensions (L x W x H)	32 x 13 x 43 mm	77 x 16 x 64 mm
Weight (typical)	20 g	50 g
Protection category EN 60529	IP 00	IP 20
Mounting on 35 mm rail mount	with socket GZMA-71	direct

● Data given for ambient temperature ≤ 25 °C. Above 25 °C the maximum current decreases - see "Thermal derating curves", page 4.

RSR89...NC


single-phase solid state relays, miniature

Mounting


Relays **RSR89...NC** are designed for mounting in plug-in sockets **GZMA-71**.
For conventional installation, the recommended minimum distance is 13 mm.

Sockets for RSR88	Accessories	Additional equipment
	Retainer / retractor clips	
Screw terminals sockets, 35 mm rail mount (acc. to EN 60715) or on panel mounting (one M3 screw)		
GZMA-71 ②	GZ7-0040 black	ZGGZ80 ③

② Socket is sold complete with retainer / retractor clip. ③ Interconnection strips ZGGZ80 - see "Connecting accessories", page 5.

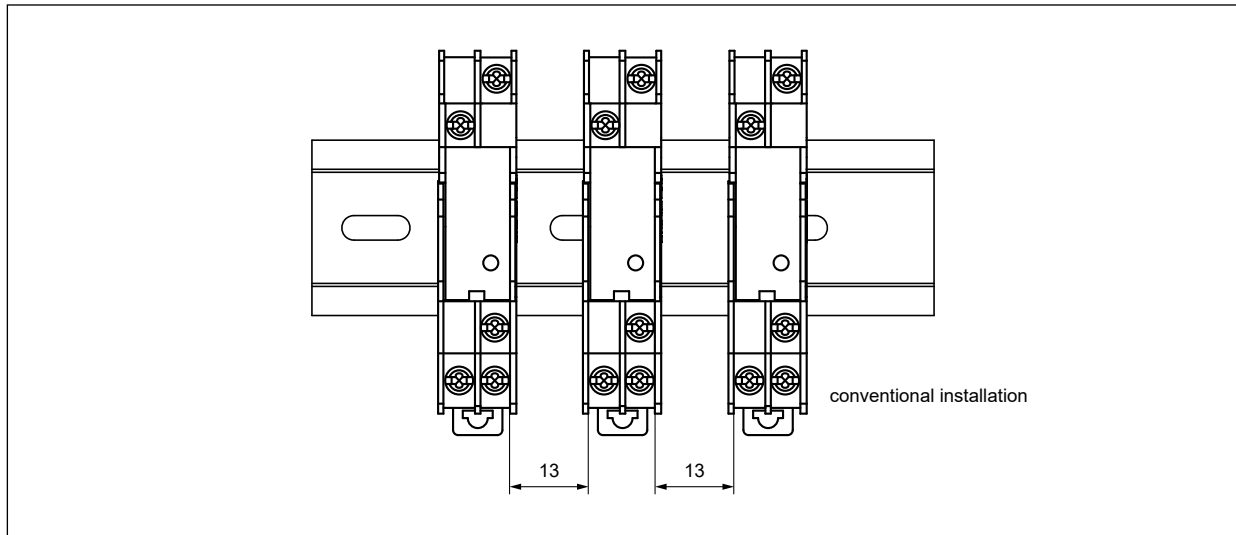


Dimensions

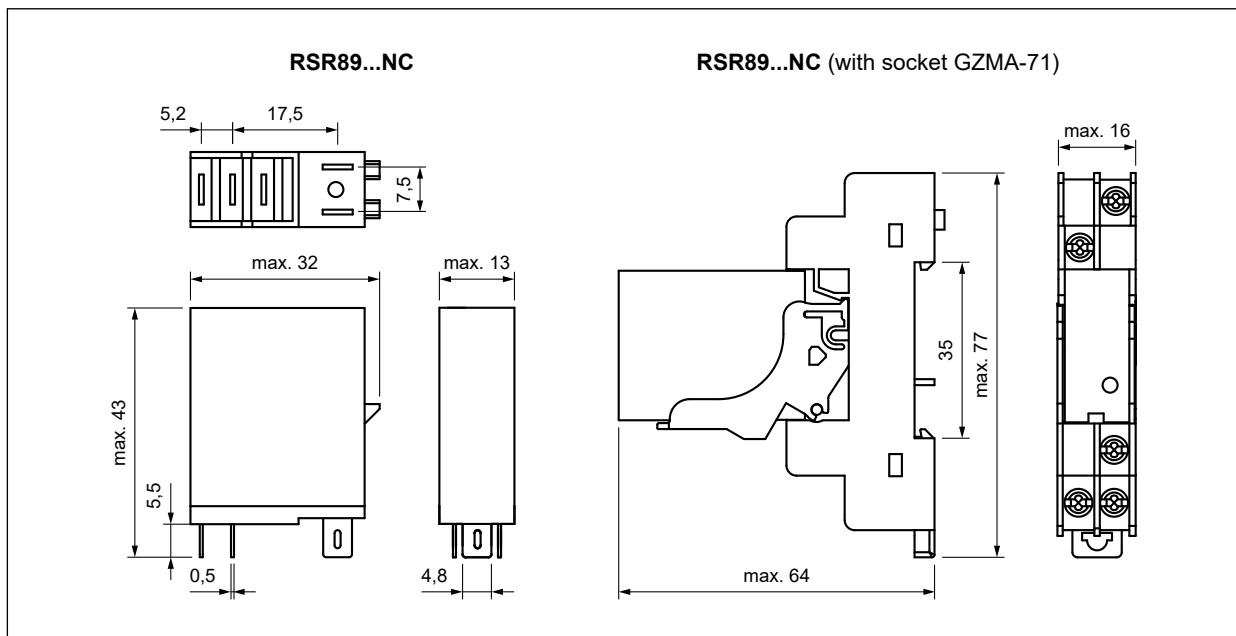


RSR89...NC

single-phase solid state relays, miniature

Thermal derating curves

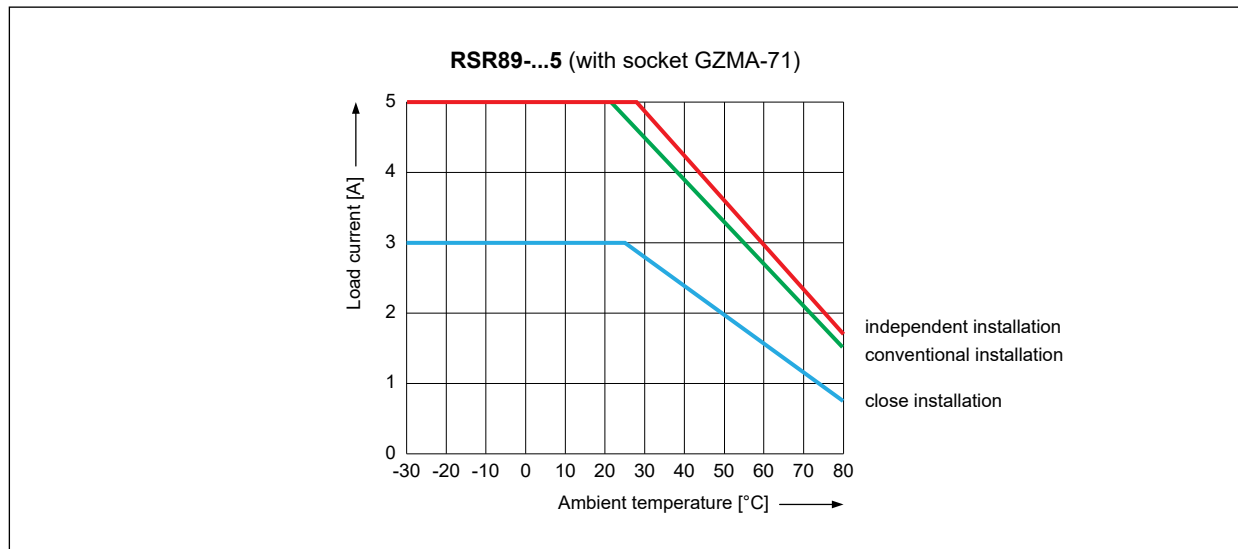

Input characteristic ④

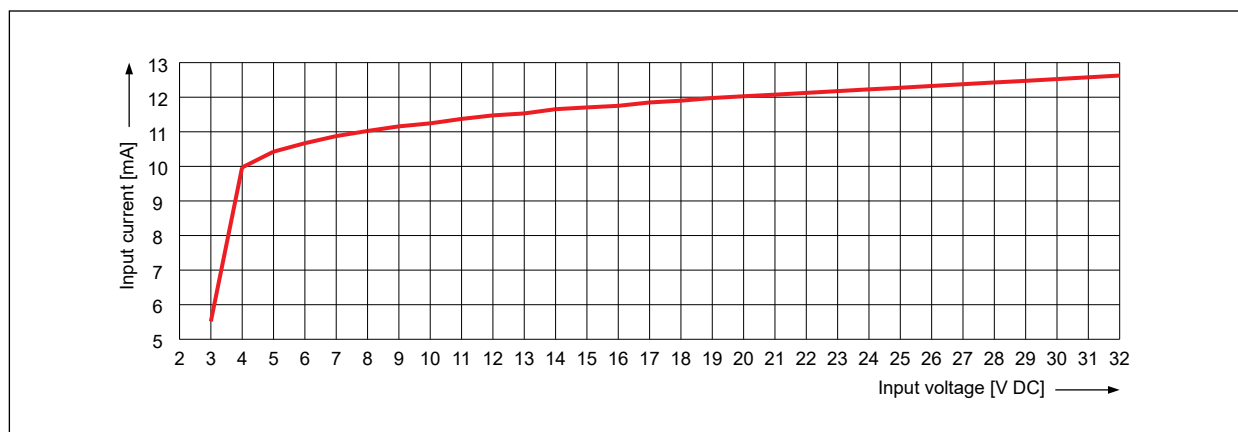

④ The input curve is measured at ambient temperature 25 °C.

GZMA-71


Screw terminals
plug-in sockets
for RSR88, RSR89




RSR89...NC

single-phase solid state relays, miniature

Connection diagrams

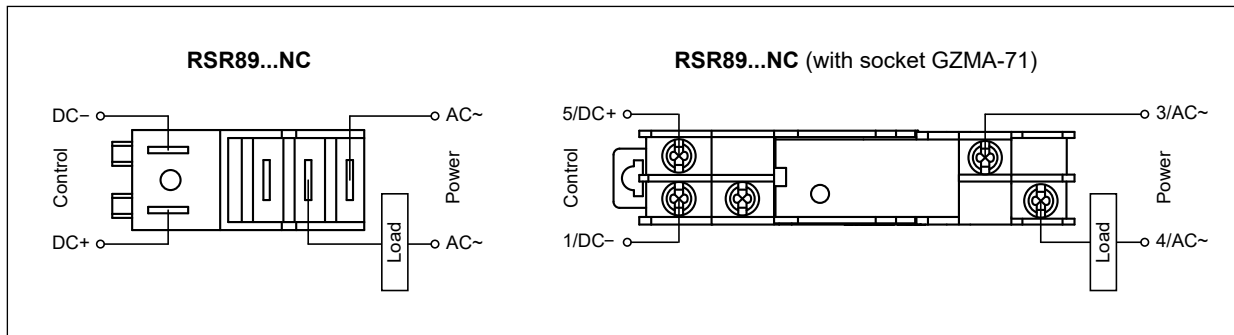

Ordering codes

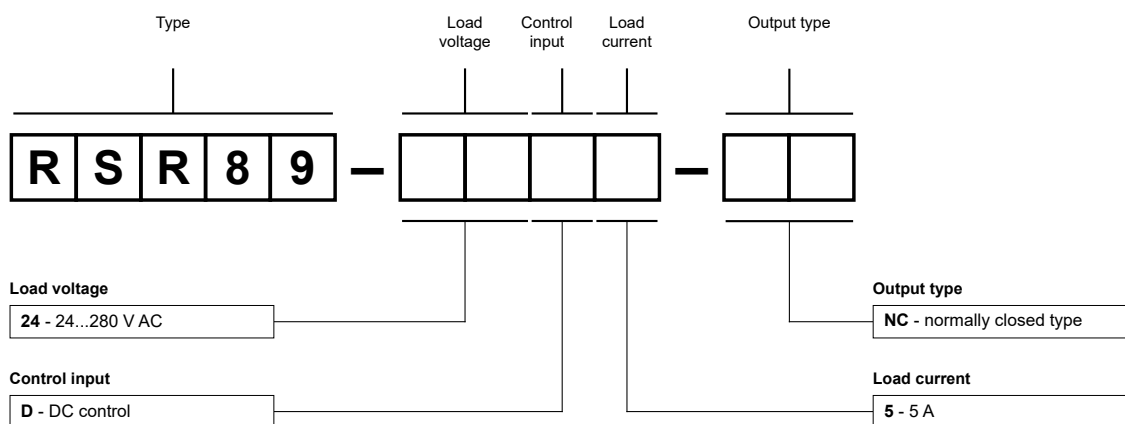

Example of ordering codes:

RSR89-24D5-NC

relay **RSR89...NC**, miniature for plug-in sockets, zero-crossing switching, DC control, load voltage 24...280 V AC (single-phase), load current 5 A, normally closed type

Connecting accessories



ZGGZ80-1 grey
ZGGZ80-2 black

Plug-in sockets **GZMA-71** may be linked with interconnection strip type **ZGGZ80**.

Strips 8-poles ZGGZ80: unlimited possibilities of connection configurations in sockets GZMA-71 (bridging of common input signals of 8 sockets - A1, A2), fast, safe and easy bridging of signals on the coil, maximum permissible current is 10 A / 250 V AC.

