

Sockets and accessories

GUC11A-V0

For RUC faston 4,8x0,5, RUC-M

Screw terminals - **Protection category: IP20**

Three poles

16 A, 250 V AC / 10 A, 400 V AC

Max. switching voltages and coil voltages of relays are limited to 250 V AC/DC

35 mm rail mount acc. to EN 60715

Cross section of the cables: max. 1 x 4 mm

Max. tightening moment


for the terminal: 0,7 Nm

Ambient temperature:


- operating -40...+70 °C

Dimensions:


35,4 x 85,6 x 42,6 mm

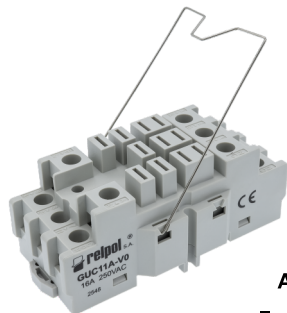

Connection diagram

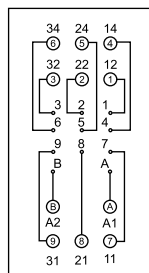

Dimensions

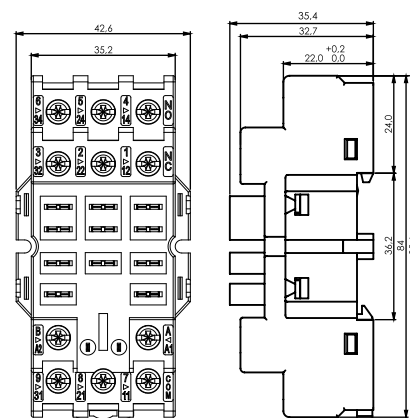

Accessories



Module type M...



Spring wire clip

Socket is sold complete with spring wire clip