





Surge arresters

for AC installations



• constructions: single and combined

- technology: varistor, spark gap, or hybrid
- with potential-free output

data sheets More information is available here





Surge arresters

for PV installations



high-energy MOV varistors

- independent MOV modules with separate indicators
- mechanical status indicators

More information is available here





data sheets

Surge arresters

for high-voltage applications



data sheets

- short-circuit withstand capability up to 50 kA RMS
- lightning current discharge up to 25 kA (10/350 μs)
- high surge current capacity up to 100 kA (8/20 μs)

More information is available here





for LAN networks

- POE-supported
- industrial and it standard mounting
- multi-stage surge protection combination of TVS/GDT/MOV technologies
- for LAN, telecommunication and it applications



data sheets







Multifunction network parameter meters

- measurement of maximum/minimum power demand
- measurement of imported/exported energy
- RS485 communication, modbus rtu protocol
- %THD from 31st to 41st harmonic level
- digital input and RTC
- accuracy class from 1 s to 0.2 s
- dedicated application for PC and meter

More information is available here



data sheets






Interface relays

PI71P, PI72P

- contacts: 1C0, 2C0
- screw terminals or Push-in terminals
- mechanical operation indicator
- built-in LED indication
- front test button



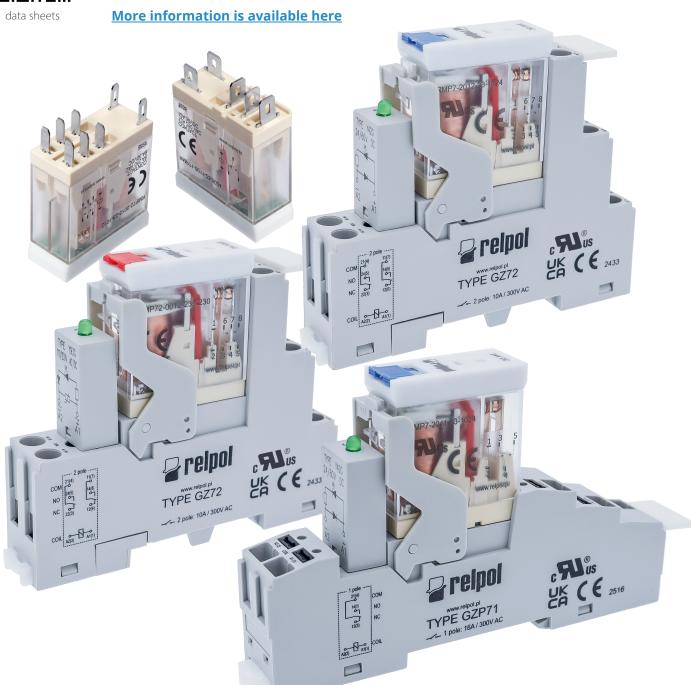



Export Sales Department phone +48 68 47 90 832, 951 export@relpol.com.pl



Solid state relays, power controllers

RSR

- two-channel
- up to 125 A
- solid state interface relays
- controllers integrated with heatsink



soid state relays



power controllers

More information is available here

More information is available here

