

PIR3T with socket GZT3-V0

relays for railroad industry - interface

R3T + GZT3-V0



- Relays designed for continuous operation* • 35 mm rail mount acc. to EN 60715 or on panel mounting with two M3 screws
- Compliance with standards: EN 45545-2 (category EL10, requirement R26 - flammability class V-0 acc. to EN 60695-11-10); EN 61373 category 1, class B (mechanical shock and vibration resistance); EN 50155; EN 60077-1; EN 61810-1
- Recognitions, certifications, directives: recognitions R3T, RoHS,



Contact data

Number and type of contacts		3 CO
Contact material		AgNi
Rated / max. switching voltage	AC	250 V / 300 V
Min. switching voltage		5 V
Rated load (capacity)	AC1	10 A / 250 V AC
	AC15	3 A / 120 V
	DC1	10 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V
Motor load	acc. to UL 508	1/2 HP
	AC3 acc. to IEC 60947-4-1	0,37 kW
Min. switching current		5 mA
Max. make current		20 A
Rated current		10 A
Max. breaking capacity	AC1	2 500 VA
Min. breaking capacity		0,3 W
Contact resistance		≤ 100 mΩ
Max. operating frequency		100 mA, 24 V
• at rated load	AC1	1 200 cycles/hour
• no load		18 000 cycles/hour

Coil data

Rated voltage	DC	24, 110 V ②
Must release voltage		≥ 0,1 U _n
Operating range of supply voltage		0,7...1,25 U _n EN 50155 see Table 1
Must operate voltage		≤ 0,7 U _n
Rated power consumption	DC	0,9 W

Insulation according to EN 60664-1

Insulation rated voltage		300 V AC
Rated surge voltage		4 000 V
Overvoltage category		1,2 / 50 μs
Insulation pollution degree		III
Insulation pollution degree		2
Flammability class		V-0
Dielectric strength		UL 94, EN 60695-11-10
• between coil and contacts		2 500 V AC
• contact clearance		1 500 V AC
• pole - pole		2 500 V AC
Contact - coil distance	• clearance	≥ 2,5 mm
	• creepage	≥ 4 mm

General data

Operating / release time (typical values)		13 ms / 3 ms
Electrical life		
• resistive AC1		> 10 ⁵
• cosφ		10 A, 250 V AC
Mechanical life (cycles)		see Fig. 2
Dimensions (L x W x H)		> 2 x 10 ⁷
Weight		76,3 x 27 x 65 mm
Ambient temperature	• storage	87 g
(non-condensation and/or icing)	• operating	-40...+85 °C
Cover protection category		-40...+55 °C
Environmental protection		IP 20
Shock / vibration resistance		EN 60529
		R3T: RTI
		GZT3-V0: RT0
		EN 61810-1
		category 1, class B EN 61373
		(set: relay in socket with clip and module)

The data in bold type relate to the standard versions of the relays. *The relays are designed for continuous operation while maintaining the parameters declared in the data sheet. ① For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC. ② For other voltages, please contact Relpol S.A.


27.11.2025

PIR3T with socket GZT3-V0

relays for railroad industry - interface


Electrical life at AC resistive load.
Switching frequency: 1 200 cycles/hour

Fig. 1

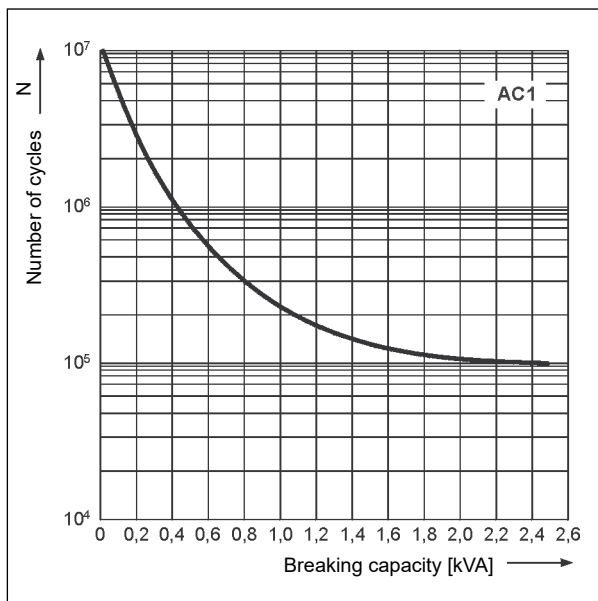


Electrical life reduction factor at AC inductive load

Fig. 2

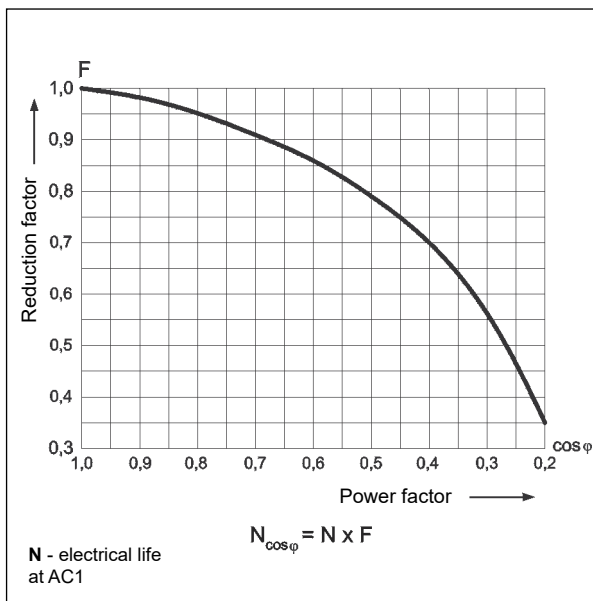


Max. DC breaking capacity
A - resistive load DC1
B - inductive load L/R = 40 ms


Fig. 3

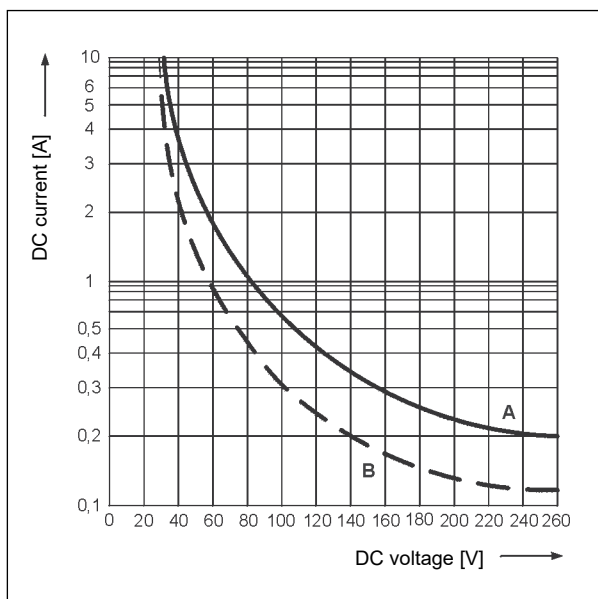

Dimensions

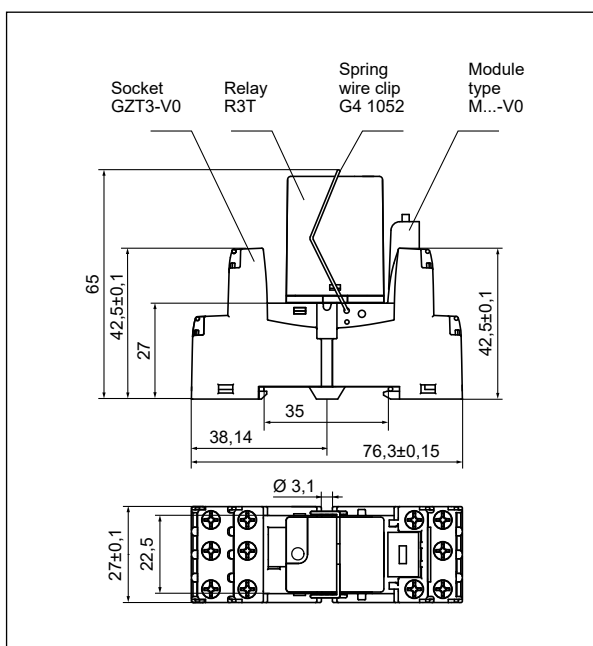


Relays for
railroad industry
- industrial

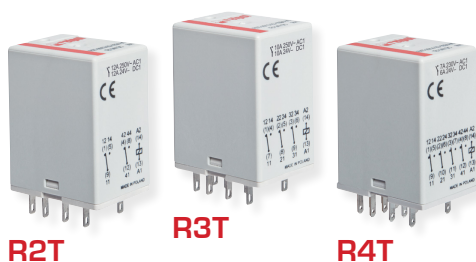

PIR3T with socket GZT3-V0

relays for railroad industry - interface

Connection diagram (screw terminals side view)

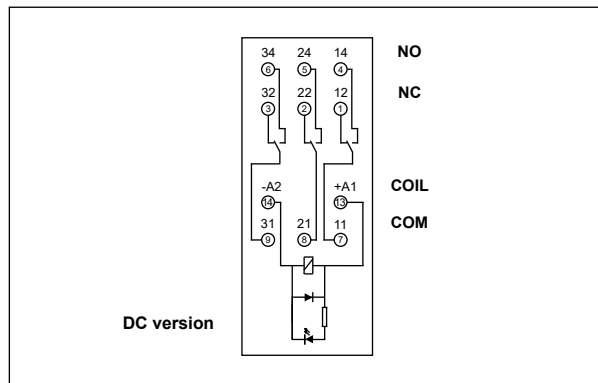

Mounting

Relays **PIR3T with socket GZT3-V0** are designed for direct mounting on 35 mm rail mount acc. to EN 60715 or on panel mounting with two M3 screws. **Connections:** max. cross section of the cables (stranded): 2 x 2,5 mm² (2 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,7 Nm.


Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC ②	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC according to EN 50155 ③	
				min.	max.
024DC	24	640	± 10%	16,8	30,0
110DC	110	13 600	± 10%	77,0	137,5

The data in bold type relate to the standard versions of the relays. ② For other voltages, please contact Relpol S.A. ③ Changes of voltage within the range 0,6...1,4 Un below 0,1 s and changes of voltage within the range 1,25...1,4 Un below 1 s are admissible and they do not distort operation of the relays.

Ordering codes

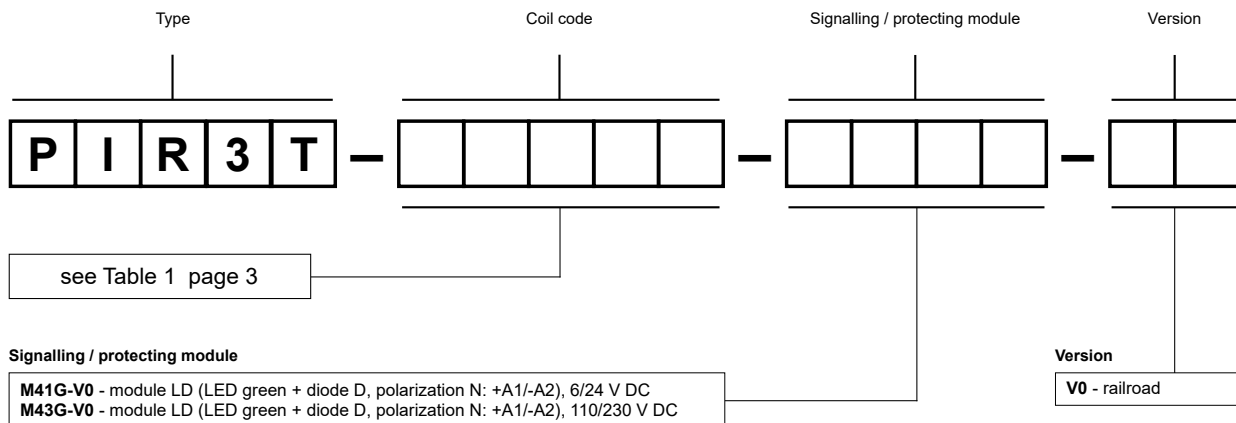

Examples of ordering codes:

PIR3T-024DC-M41G-V0

interface relay **PIR3T** (railroad version) consists of: relay **R3T** (three changeover contacts, contact material AgNi, coil voltage 24 V DC), socket **GZT3-V0** (grey, screw terminals), signalling / protecting module **M41G-V0** (version LD), spring wire clip **G4 1052**

PIR3T-110DC-M43G-V0

interface relay **PIR3T** (railroad version) consists of: relay **R3T** (three changeover contacts, contact material AgNi, coil voltage 110 V DC), socket **GZT3-V0** (grey, screw terminals), signalling / protecting module **M43G-V0** (version LD), spring wire clip **G4 1052**

PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.