

R15T - 2 CO, 3 CO

relays for railroad industry - industrial



R15T - 2 CO



R15T - 3 CO

- Relays designed for continuous operation*
- For plug-in sockets: on 35 mm rail mount acc. to EN 60715 or on panel mounting • DC coils, insulation class F: 155 °C
- Compliance with standards: EN 45545-2 (category EL10, requirement R26 - flammability class V-0 acc. to EN 60695-11-10); EN 61373 category 1, class B (mechanical shock and vibration resistance); EN 50155; EN 60077-1; EN 61810-1
- Recognitions, certifications, directives: RoHS,  

Contact data

Number and type of contacts	2 CO, 3 CO
Contact material	AgNi
Rated / max. switching voltage	AC 250 V / 440 V
Min. switching voltage	5 V
Rated load (capacity)	AC1 10 A / 250 V AC AC15 3 A / 120 V 1,5 A / 240 V (B300) DC1 10 A / 24 V DC (see Fig. 3) DC13 0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508 1/2 HP 240 V AC, 4,9 FLA, single-phase motor ② AC3 acc. to IEC 60947-4-1 0,37 kW 240 V AC, single-phase motor
Min. switching current	5 mA
Max. make current	20 A
Rated current	10 A
Max. breaking capacity	AC1 2 500 VA
Min. breaking capacity	0,3 W
Contact resistance	≤ 100 mΩ
Max. operating frequency	
• at rated load	AC1 1 200 cycles/hour
• no load	12 000 cycles/hour

Coil data

Rated voltage	DC 24, 110 V ①
Must release voltage	≥ 0,1 U _n
Operating range of supply voltage	0,7...1,25 U _n EN 50155 see Table 1
Must operate voltage	≤ 0,7 U _n
Rated power consumption	DC 1,7 W reinforced version

Insulation according to EN 60664-1

Insulation rated voltage	250 V AC
Rated surge voltage	2 500 V 1,2 / 50 μs
Overvoltage category	III
Insulation pollution degree	3
Flammability class	V-0 UL 94, PN-EN 60695-11-10
Dielectric strength	
• between coil and contacts	2 500 V AC type of insulation: basic
• contact clearance	1 500 V AC type of clearance: micro-disconnection
• pole - pole	2 000 V AC type of insulation: basic
Contact - coil distance	• clearance ≥ 3 mm
• creepage	≥ 4,2 mm

General data

Operating / release time (typical values)	18 ms / 7 ms
Electrical life	
• resistive AC1	> 2 x 10 ⁵ 10 A, 250 V AC
• cosφ	see Fig. 2
Mechanical life (cycles)	> 2 x 10 ⁷
Dimensions (L x W x H)	35 x 35 x 54,4 mm
Weight	83 g
Ambient temperature	• storage -40...+85 °C
(non-condensation and/or icing)	• operating -40...+70 °C
Cover protection category	IP 40 IP 20 (with socket PZ8-V0, PZ11-V0) EN 60529
Environmental protection	RTI EN 61810-1
Shock resistance	10 g category 1, class B EN 61373
Vibration resistance	5 g 10...150 Hz category 1, class B EN 61373


The data in bold type relate to the standard versions of the relays. *The relays are designed for continuous operation while maintaining the parameters declared in the data sheet. ① Certification IK for interface set PIR15.T (R15T with socket PZ...-V0). ② For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC. ③ For other voltages, please contact Relpol S.A.

R15T - 2 CO, 3 CO

relays for railroad industry - industrial


Electrical life at AC resistive load.
Switching frequency: 1 200 cycles/hour

Fig. 1

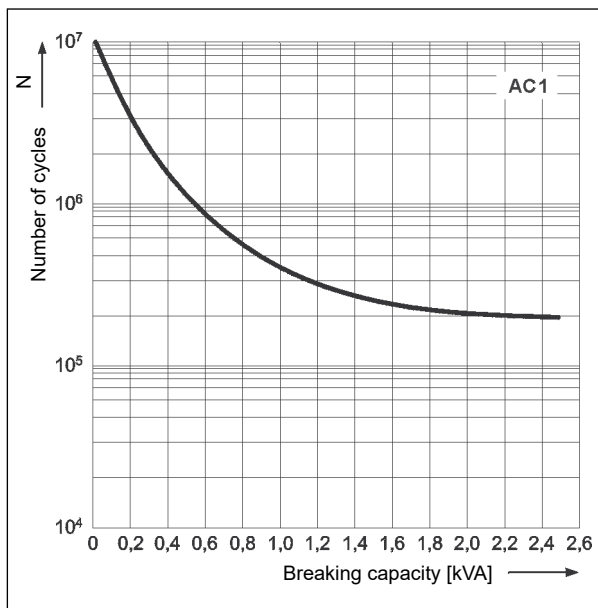


Electrical life reduction factor at AC inductive load

Fig. 2

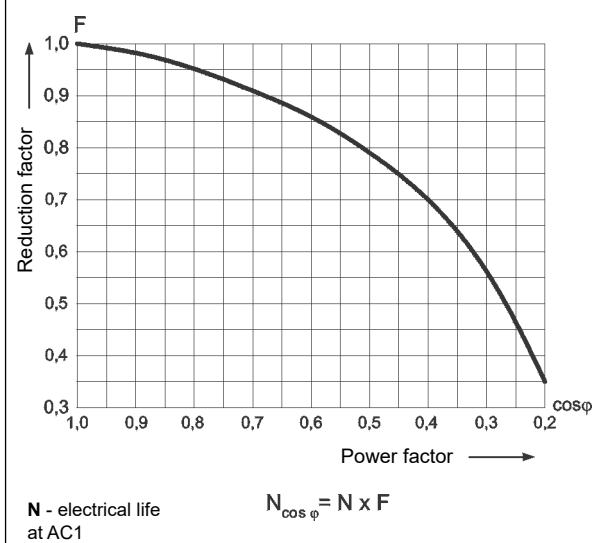


Max. DC breaking capacity
A - resistive load DC1
B - inductive load L/R = 40 ms


Fig. 3

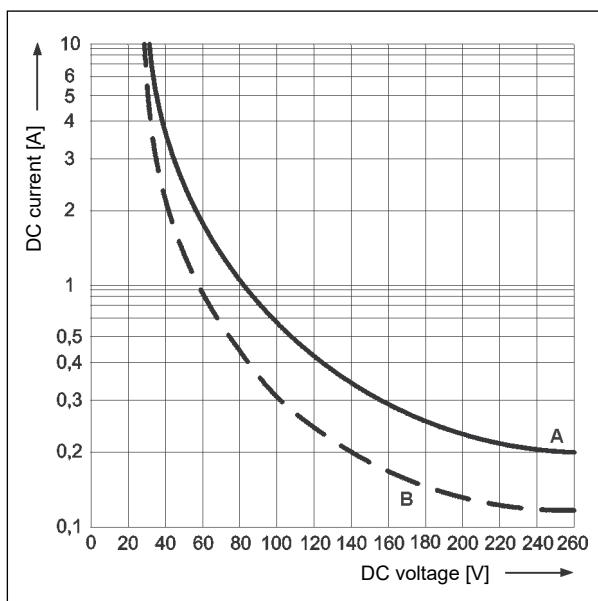

Dimensions

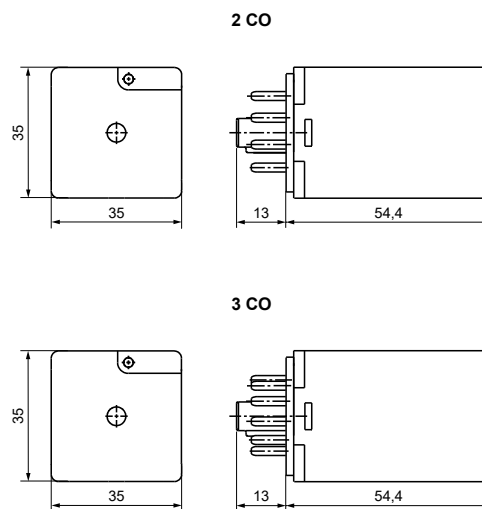

Connection diagrams (pin side view)

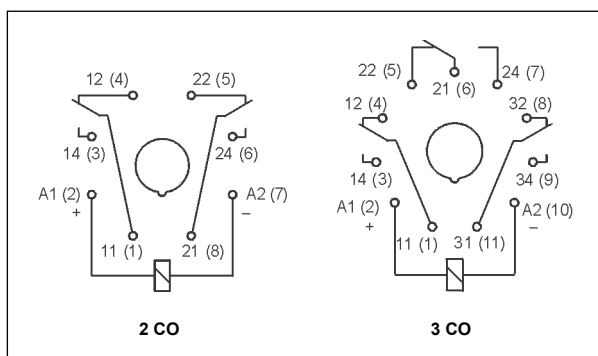

PIR15.T

Relays for
railroad industry
- interface,
contacts
2 CO, 3 CO



R15T - 2 CO, 3 CO

relays for railroad industry - industrial

Mounting, sockets and accessories for relays

Relays **R15T - 2 CO, 3 CO** are designed for mounting in plug-in sockets.

Sockets for R15T - 2 CO	Sockets for R15T - 3 CO	Accessories
		Spring wire clips
Screw terminals sockets , 35 mm rail mount (acc. to EN 60715) or on panel mounting (two M3 screws)		
PZ8-V0	PZ11-V0	PZ11 0031


Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC ③	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC EN 50155 ④	
				min.	max.
W024	24	345	± 10%	16,8	30,0
W110	110	7 300	± 10%	77,0	137,5

The data in bold type relate to the standard versions of the relays. ③ For other voltages, please contact Relpol S.A. ④ Changes of voltage within the range 0,6...1,4 Un below 0,1 s and changes of voltage within the range 1,25...1,4 Un below 1 s are admissible and they do not distort operation of the relays.

Ordering codes

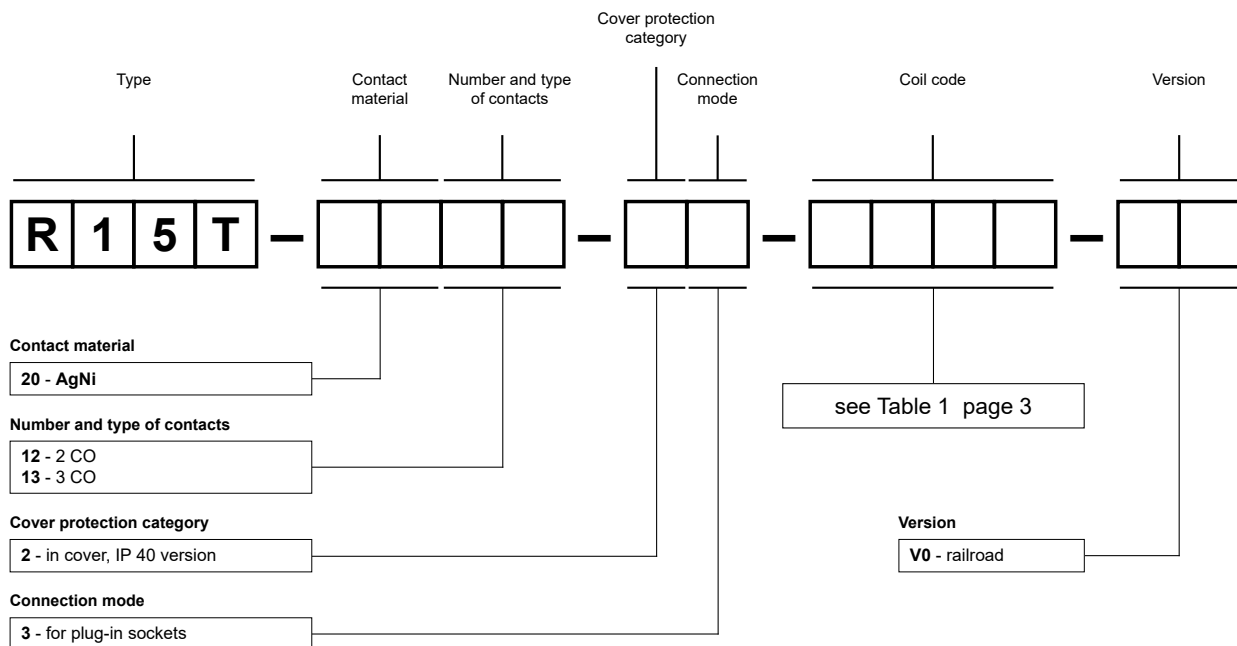

Examples of ordering codes:

R15T-1212-23-W024-V0

relay **R15T** (railroad version), for plug-in sockets, two changeover contacts, contact material AgNi, reinforced coil voltage 24 V DC, in cover IP 40

R15T-1213-23-W110-V0

relay **R15T** (railroad version), for plug-in sockets, three changeover contacts, contact material AgNi, reinforced coil voltage 110 V DC, in cover IP 40


PZ8-VO

For R15T - 2 CO

Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
35 mm rail mount
acc. to EN 60715
or on panel mounting
68,2 x 38 x 24,2 mm
Two poles
10 A, 250 V AC




Connection diagram



PZ11 0031

Accessories


Dimensions

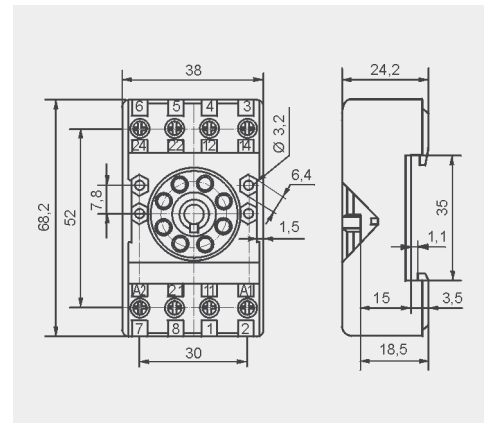


PZ11-VO

For R15T - 3 CO

Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
35 mm rail mount
acc. to EN 60715
or on panel mounting
68,2 x 38 x 24,2 mm
Three poles
10 A, 250 V AC




Connection diagram



PZ11 0031

Accessories

Dimensions

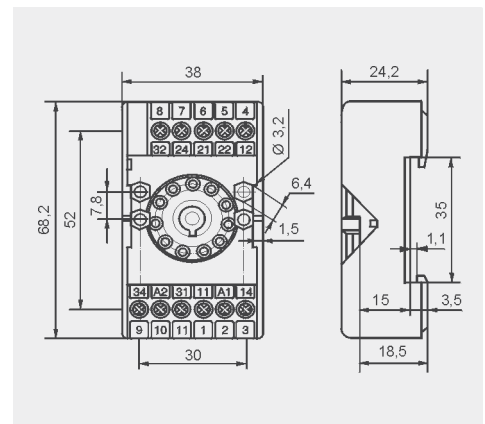

PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.