


Sockets and accessories

GZ71 ①


For RMP7 1 CO

Screw terminals
Max. tightening moment
for the terminal: 0,4 Nm


35 mm rail mount acc. to EN 60715
or on panel mounting
81,9 x 15,8 x 61,2(61,5) mm ③
One pole, 5 mm pinout
16 A, 300 V AC



Connection diagrams



RMP7 1 CO



Module type Y... GZ7-0040




Accessories ②

ZGGZ80

GZ7-0035

Dimensions

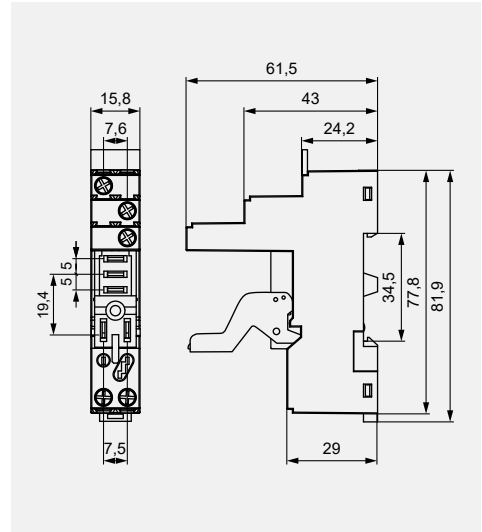


GZ72 ①


For RMP7 2 CO

Screw terminals
Max. tightening moment
for the terminal: 0,4 Nm


35 mm rail mount acc. to EN 60715
or on panel mounting
81,9 x 15,8 x 61,2(61,5) mm ③
Two poles, 5 mm pinout
10 A, 300 V AC



Connection diagrams



RMP7 2 CO



Module type Y... GZ7-0040




Accessories ②

ZGGZ80

GZ7-0035

Dimensions

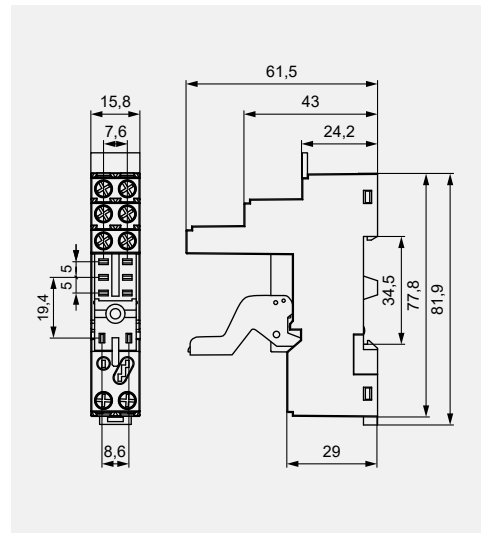

- ① Socket is sold complete with retainer / retractor clip and description plate.
- ② Signalling / protecting modules type Y..., interconnection strips ZGGZ80 - see www.repol.com.pl
- ③ In the bracket the height of socket with retainer / retractor clip is shown.

Sockets and accessories

GZP71 ①

For RMP7 1 CO

Push-in terminals

Max. cross section of the cables:
 2 x 1,5 mm² (ferrules without insulation)
 2 x 1 mm² (ferrules with insulation)
 Stripping length: 8...10 mm


35 mm rail mount acc. to EN 60715

or on panel mounting


99,8 x 16,1 x 34,2(61,8) mm ③

One pole, 5 mm pinout


16 A, 300 V AC

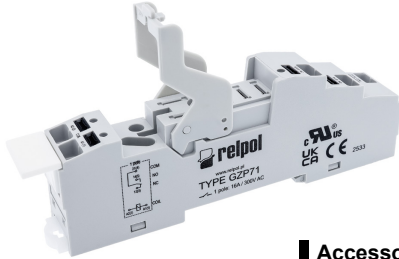

Connection diagrams



RMP7 1 CO




Accessories ②

ZGZP80-2

ZGZP-2

GZ7-0035

Dimensions

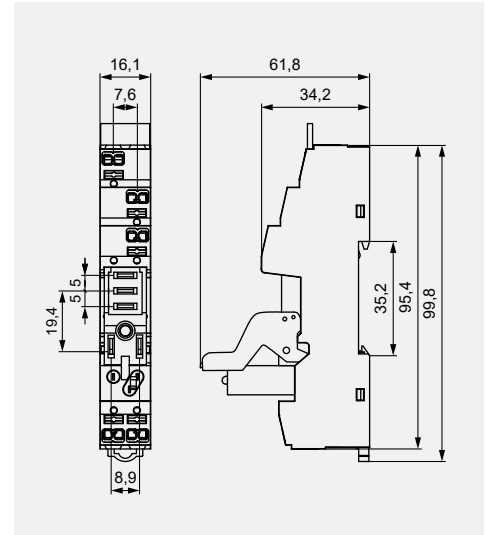

GZP72 ①

For RMP7 2 CO

Push-in terminals

Max. cross section of the cables:
 2 x 1,5 mm² (ferrules without insulation)
 2 x 1 mm² (ferrules with insulation)
 Stripping length: 8...10 mm


35 mm rail mount acc. to EN 60715

or on panel mounting


99,8 x 16,1 x 34,2(61,8) mm ③

Two poles, 5 mm pinout


10 A, 300 V AC

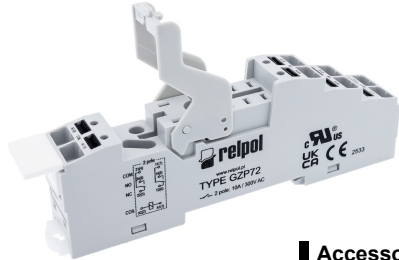

Connection diagrams



RMP7 2 CO




Accessories ②

ZGZP80-2

ZGZP-2

GZ7-0035

Dimensions

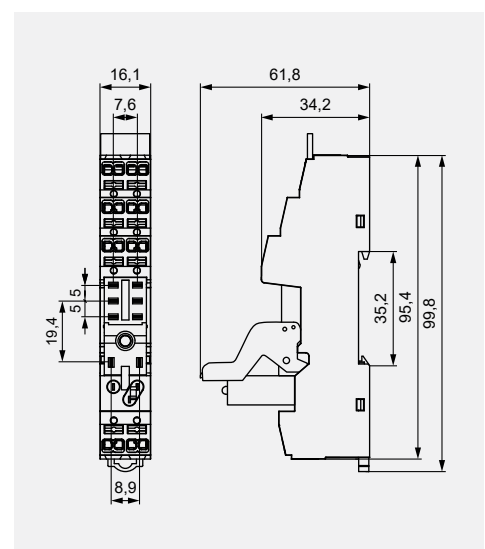

- ① Socket is sold complete with retainer / retractor clip and description plate.
- ② Signalling / protecting modules type Y..., interconnection strips ZGZP... - see www.repol.com.pl
- ③ In the bracket the height of socket with retainer / retractor clip is shown.

Sockets and accessories

GZMA-71 ①


For RMP7 1 CO

Screw terminals
Max. tightening moment
for the terminal: 0,5 Nm

35 mm rail mount acc. to EN 60715
or on panel mounting
74,7 x 15,8 x 31(55) mm ③
5 mm pinout
12 A, 300 V AC



Connection diagrams



RMP7 1 CO



GZ7-0040 black




ZGGZ80



GZ7-0035

Dimensions



GZMA-72 ①


For RMP7 2 CO

Screw terminals
Max. tightening moment
for the terminal: 0,5 Nm

35 mm rail mount acc. to EN 60715
or on panel mounting
74,7 x 15,8 x 31(55) mm ③
5 mm pinout
2x8 A, 300 V AC



Connection diagrams



RMP7 2 CO



GZ7-0040 black




ZGGZ80



GZ7-0035

Dimensions



- ① Socket is sold complete with retainer / retractor clip and description plate.
- ② Interconnection strips ZGGZ80 - see www.repol.com.pl
- ③ In the bracket the height of socket with retainer / retractor clip is shown.